

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

report number : SHE19110011-02CE

Note : Transmit frequency is ignore ,mark →

30M-1G

WIFI2.4G- Horizontal-TX

Test result

Project Number: Certification

Test Time: 2020-01-07_19.03.36

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 20.9

Load: Full load

Hum.: 50

Remark: DR-RSE01-E19110011-05#04

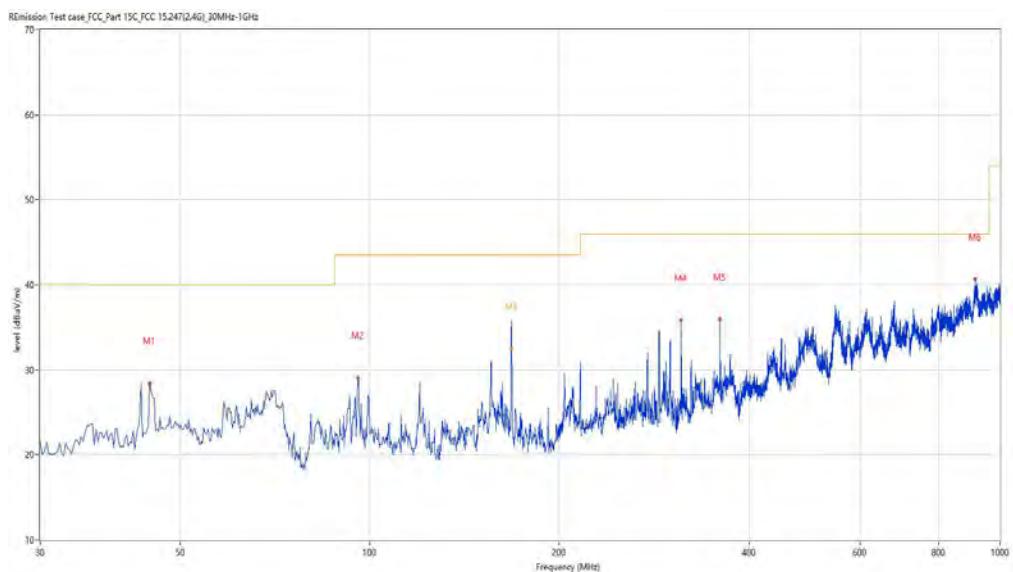

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	44.789	28.42	-25.06	40.0	-11.58	Peak	234.10	200	Horizontal	Pass
2	95.701	29.05	-26.89	43.5	-14.45	Peak	31.10	200	Horizontal	Pass
3	167.998	37.11	-29.04	43.5	-6.39	Peak	291.10	100	Horizontal	Pass
3*	167.998	32.52	-29.04	43.5	-10.98	QP	291.10	100	Horizontal	Pass
4	311.957	35.85	-24.18	46.0	-10.15	Peak	262.40	100	Horizontal	Pass
5	359.960	35.92	-23.76	46.0	-10.08	Peak	289.20	100	Horizontal	Pass
6	914.419	40.62	-10.25	46.0	-5.38	Peak	157.80	100	Horizontal	Pass


WIFI2.4G-Vertical-TX

Test result

Project Number: Certification

Test Time: 2020-01-07_19.09.12

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

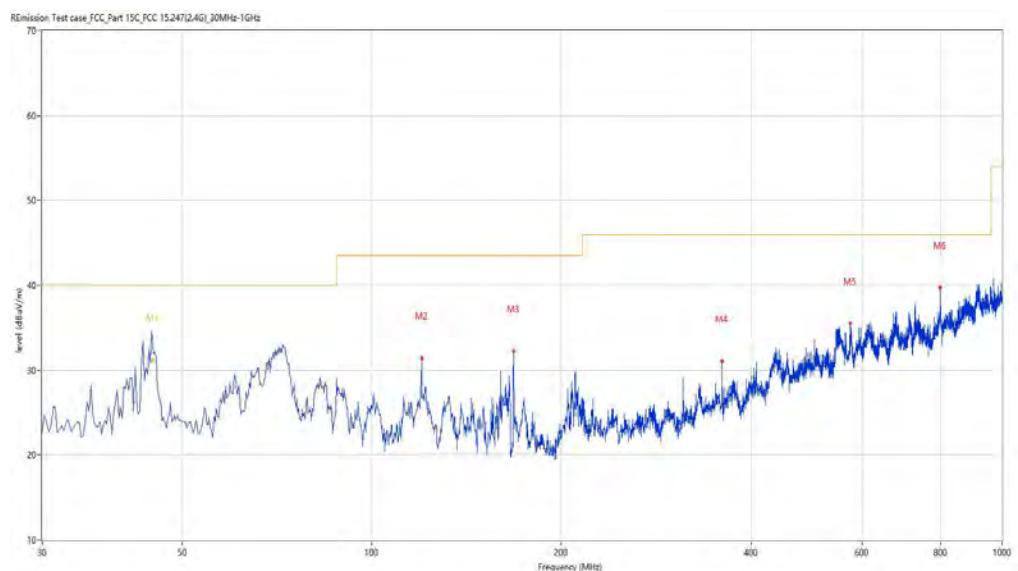

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	44.981	36.65	-25.06	40.0	-3.35	Peak	91.00	100	Vertical	Pass
1*	44.981	31.16	-25.06	40.0	-8.84	QP	91.00	100	Vertical	Pass
2	119.945	31.43	-27.10	43.5	-12.07	Peak	333.30	100	Vertical	Pass
3	167.948	32.19	-29.04	43.5	-11.31	Peak	82.40	100	Vertical	Pass
4	359.960	31.08	-23.76	46.0	-14.92	Peak	0.00	200	Vertical	Pass
5	575.004	35.49	-16.25	46.0	-10.51	Peak	263.30	100	Vertical	Pass
6	797.563	39.72	-11.61	46.0	-6.28	Peak	69.00	100	Vertical	Pass

1-18G


WIFI2.4G-B- Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2020-01-09_18.29.43

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

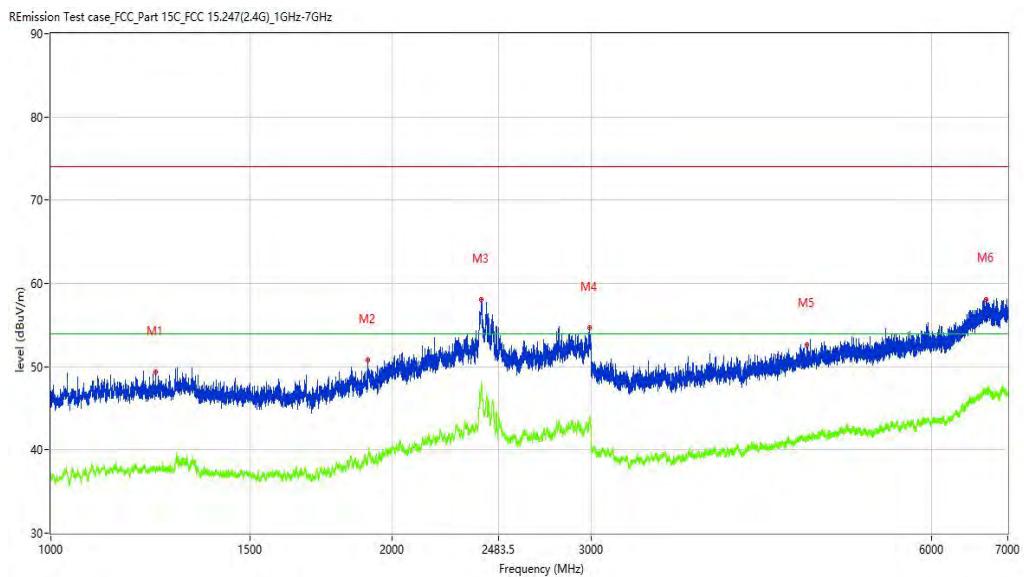


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1236.470	49.32	-4.42	74.0	-24.68	Peak	105.20	100	Horizontal	Pass
1**	1236.470	37.80	-4.42	54.0	-16.20	AV	105.20	100	Horizontal	Pass
2	1905.637	50.75	-3.40	74.0	-23.25	Peak	53.10	100	Horizontal	Pass
2**	1905.637	38.76	-3.40	54.0	-15.24	AV	53.10	100	Horizontal	Pass
3	2400.075	58.01	5.37	74.0	-15.99	Peak	322.50	100	Horizontal	Pass
3**	2400.075	47.80	5.37	54.0	-6.20	AV	322.50	100	Horizontal	Pass
4	2992.001	54.69	3.19	74.0	-19.31	Peak	124.20	100	Horizontal	Pass
4**	2992.001	43.68	3.19	54.0	-10.32	AV	124.20	100	Horizontal	Pass
5	4651.794	52.67	0.91	74.0	-21.33	Peak	344.10	100	Horizontal	Pass
5**	4651.794	41.73	0.91	54.0	-12.27	AV	344.10	100	Horizontal	Pass
6	6704.037	58.10	5.95	74.0	-15.90	Peak	197.10	100	Horizontal	Pass
6**	6704.037	46.83	5.95	54.0	-7.17	AV	197.10	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_18.13.40

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

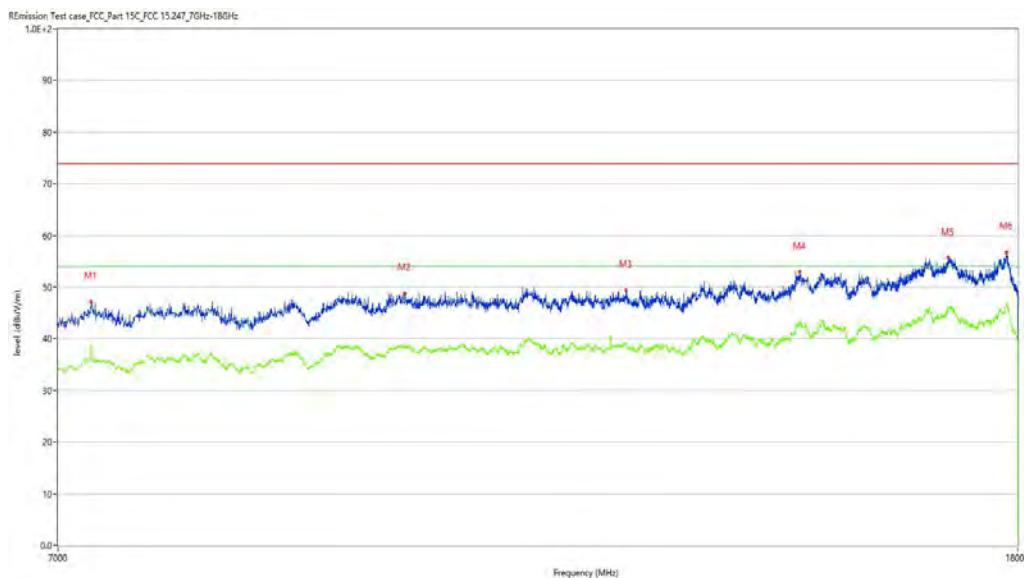


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7186.953	44.53	2.75	74.0	-29.47	Peak	39.10	100	Horizontal	Pass
1**	7186.953	35.39	2.75	54.0	-18.61	AV	39.10	100	Horizontal	Pass
2	9845.539	48.85	9.47	74.0	-25.15	Peak	307.40	100	Horizontal	Pass
2**	9845.539	38.27	9.47	54.0	-15.73	AV	307.40	100	Horizontal	Pass
3	12242.939	49.45	11.06	74.0	-24.55	Peak	303.30	100	Horizontal	Pass
3**	12242.939	39.11	11.06	54.0	-14.89	AV	303.30	100	Horizontal	Pass
4	14522.119	53.02	17.02	74.0	-20.98	Peak	173.80	100	Horizontal	Pass
4**	14522.119	42.81	17.02	54.0	-11.19	AV	173.80	100	Horizontal	Pass
5	16809.548	55.75	20.02	74.0	-18.25	Peak	39.10	100	Horizontal	Pass
5**	16809.548	45.74	20.02	54.0	-8.26	AV	39.10	100	Horizontal	Pass
6	17796.551	56.83	21.12	74.0	-17.17	Peak	146.30	100	Horizontal	Pass
6**	17796.551	46.52	21.12	54.0	-7.48	AV	146.30	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-09_17.27.43

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

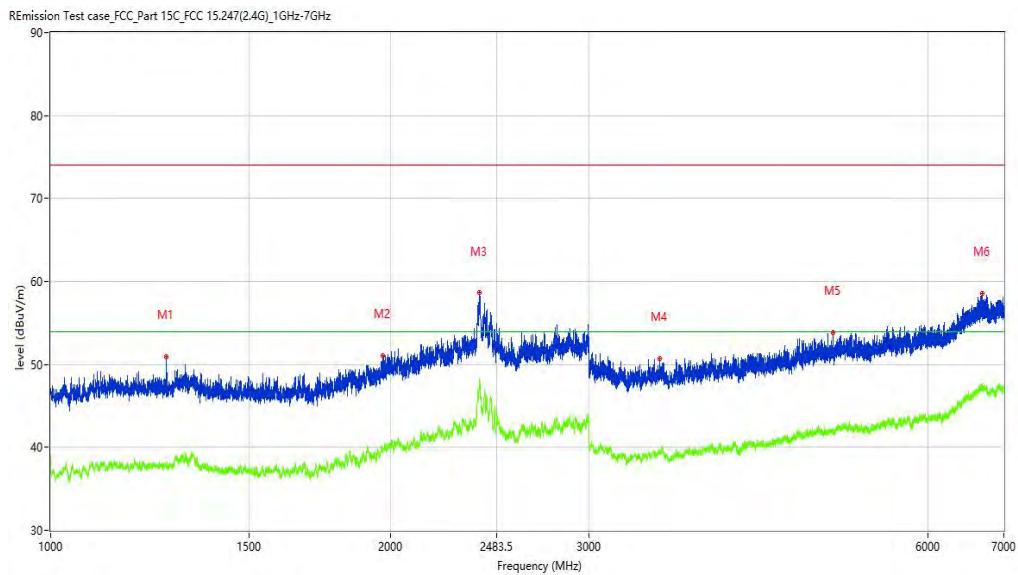

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1265.467	50.98	-4.43	74.0	-23.02	Peak	240.80	100	Vertical	Pass
1**	1265.467	37.50	-4.43	54.0	-16.50	AV	240.80	100	Vertical	Pass
2	1970.879	51.10	-2.77	74.0	-22.90	Peak	65.90	100	Vertical	Pass
2**	1970.879	39.68	-2.77	54.0	-14.32	AV	65.90	100	Vertical	Pass
3	2399.825	58.62	5.38	74.0	-15.38	Peak	108.70	100	Vertical	Pass
3**	2399.825	47.84	5.38	54.0	-6.16	AV	108.70	100	Vertical	Pass
4	3467.942	50.71	-1.30	74.0	-23.29	Peak	303.10	100	Vertical	Pass
4**	3467.942	39.20	-1.30	54.0	-14.80	AV	303.10	100	Vertical	Pass
5	4942.757	53.88	1.43	74.0	-20.12	Peak	202.70	100	Vertical	Pass
5**	4942.757	41.67	1.43	54.0	-12.33	AV	202.70	100	Vertical	Pass
6	6695.538	58.58	5.92	74.0	-15.42	Peak	276.00	100	Vertical	Pass
6**	6695.538	47.66	5.92	54.0	-6.34	AV	276.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_17.04.14

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 20.9

Load: Full load

Hum.: 50

Remark: DR-RSE01-E19110011-05#04

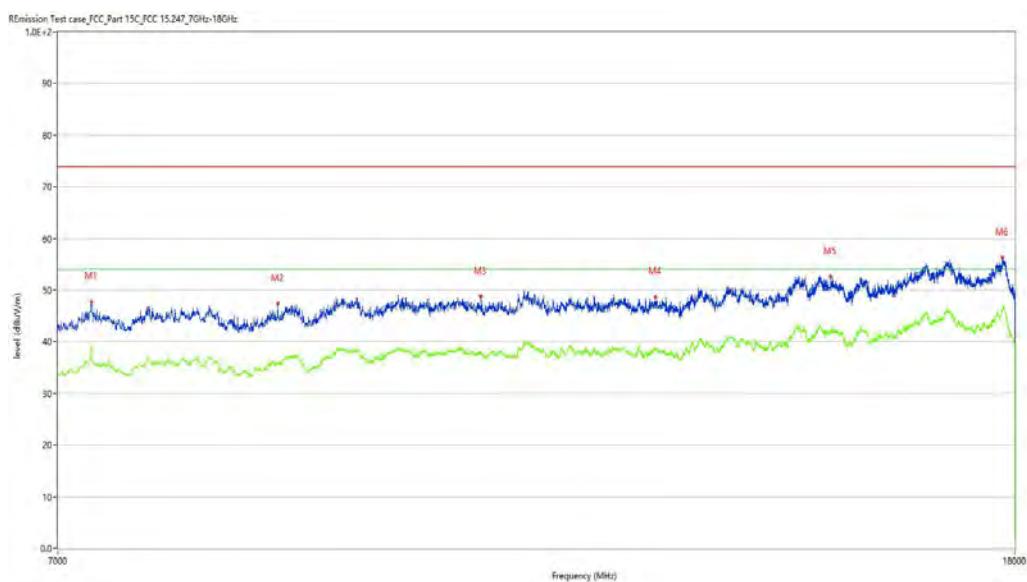


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7189.703	45.59	2.77	74.0	-28.41	Peak	19.70	100	Vertical	Pass
1**	7189.703	36.39	2.77	54.0	-17.61	AV	19.70	100	Vertical	Pass
2	8696.326	47.43	5.98	74.0	-26.57	Peak	176.80	100	Vertical	Pass
2**	8696.326	35.79	5.98	54.0	-18.21	AV	176.80	100	Vertical	Pass
3	10626.343	48.79	10.05	74.0	-25.21	Peak	358.10	100	Vertical	Pass
3**	10626.343	37.92	10.05	54.0	-16.08	AV	358.10	100	Vertical	Pass
4	12622.344	48.69	11.33	74.0	-25.31	Peak	353.80	100	Vertical	Pass
4**	12622.344	38.85	11.33	54.0	-15.15	AV	353.80	100	Vertical	Pass
5	15005.999	52.69	16.58	74.0	-21.31	Peak	19.70	100	Vertical	Pass
5**	15005.999	42.00	16.58	54.0	-12.00	AV	19.70	100	Vertical	Pass
6	17777.306	56.37	21.20	74.0	-17.63	Peak	344.70	100	Vertical	Pass
6**	17777.306	46.28	21.20	54.0	-7.72	AV	344.70	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_15.58.41

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

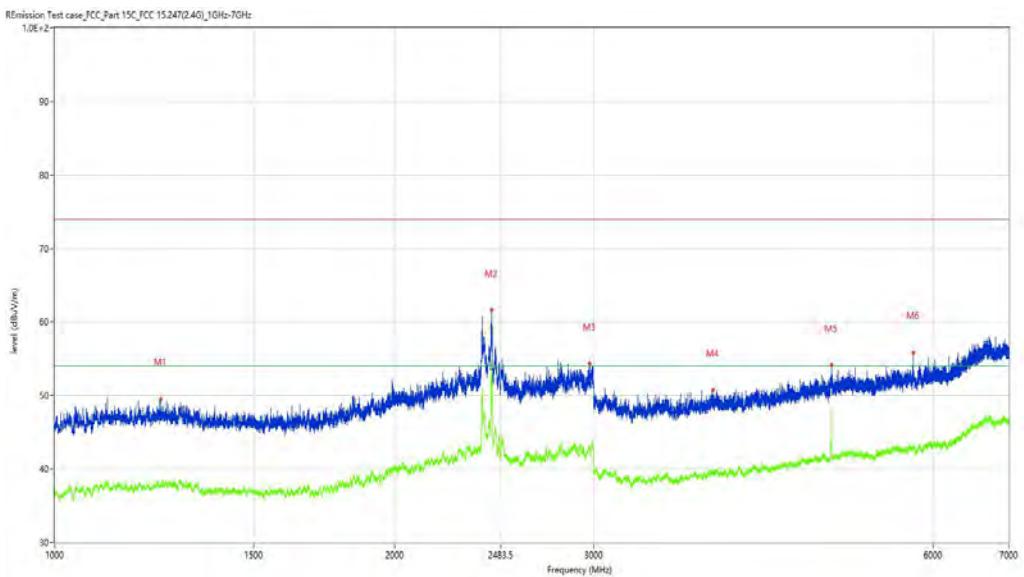


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1241.720	49.52	-4.45	74.0	-24.48	Peak	246.10	100	Horizontal	Pass
1**	1241.720	38.00	-4.45	54.0	-16.00	AV	246.10	100	Horizontal	Pass
2	2438.320	61.58	3.87	74.0	-12.42	Peak	109.50	100	Horizontal	Pass
2**	2438.320	54.00	3.87	54.0	-0.00	AV	109.50	100	Horizontal	N.A
3	2976.003	54.34	2.81	74.0	-19.66	Peak	279.20	100	Horizontal	Pass
3**	2976.003	42.68	2.81	54.0	-11.32	AV	279.20	100	Horizontal	Pass
4	3826.897	50.77	-0.63	74.0	-23.23	Peak	164.90	100	Horizontal	Pass
4**	3826.897	39.63	-0.63	54.0	-14.37	AV	164.90	100	Horizontal	Pass
5	4873.766	54.09	1.21	74.0	-19.91	Peak	300.40	100	Horizontal	Pass
5**	4873.766	48.11	1.21	54.0	-5.89	AV	300.40	100	Horizontal	Pass
6	5757.155	55.85	2.16	74.0	-18.15	Peak	332.40	100	Horizontal	Pass
6**	5757.155	42.88	2.16	54.0	-11.12	AV	332.40	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_18.29.26

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

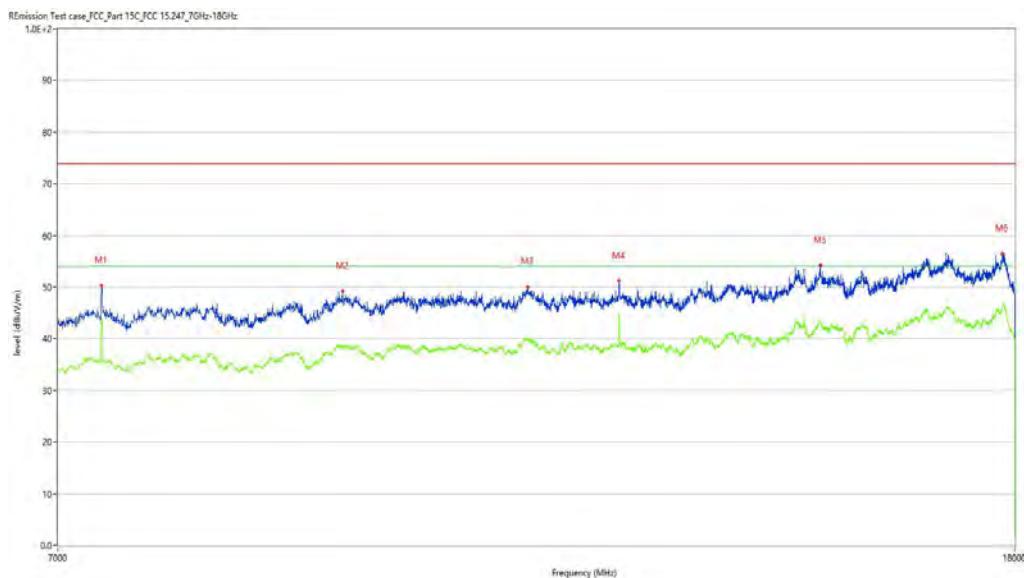


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7307.923	50.32	3.00	74.0	-23.68	Peak	225.50	100	Horizontal	Pass
1**	7307.923	43.92	3.00	54.0	-10.08	AV	225.50	100	Horizontal	Pass
2	9270.932	49.23	8.82	74.0	-24.77	Peak	198.70	100	Horizontal	Pass
2**	9270.932	38.62	8.82	54.0	-15.38	AV	198.70	100	Horizontal	Pass
3	11126.718	50.06	10.72	74.0	-23.94	Peak	44.20	100	Horizontal	Pass
3**	11126.718	39.81	10.72	54.0	-14.19	AV	44.20	100	Horizontal	Pass
4	12182.454	51.21	10.89	74.0	-22.79	Peak	239.70	100	Horizontal	Pass
4**	12182.454	44.82	10.89	54.0	-9.18	AV	239.70	100	Horizontal	Pass
5	14854.786	54.19	18.14	74.0	-19.81	Peak	0.00	100	Horizontal	Pass
5**	14854.786	43.24	18.14	54.0	-10.76	AV	0.00	100	Horizontal	Pass
6	17777.306	56.43	21.20	74.0	-17.57	Peak	188.70	100	Horizontal	Pass
6**	17777.306	46.02	21.20	54.0	-7.98	AV	188.70	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-09_17.26.57

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

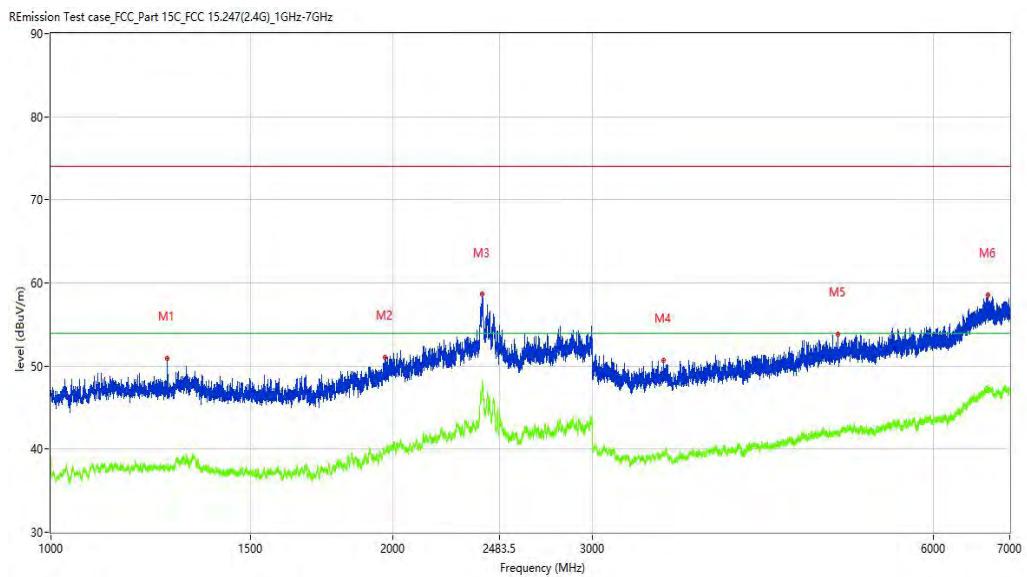

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1265.467	50.98	-4.43	74.0	-23.02	Peak	240.80	100	Vertical	Pass
1**	1265.467	37.50	-4.43	54.0	-16.50	AV	240.80	100	Vertical	Pass
2	1970.879	51.10	-2.77	74.0	-22.90	Peak	65.90	100	Vertical	Pass
2**	1970.879	39.68	-2.77	54.0	-14.32	AV	65.90	100	Vertical	Pass
3	2399.825	58.62	5.38	74.0	-15.38	Peak	108.70	100	Vertical	Pass
3**	2399.825	47.84	5.38	54.0	-6.16	AV	108.70	100	Vertical	Pass
4	3467.942	50.71	-1.30	74.0	-23.29	Peak	303.10	100	Vertical	Pass
4**	3467.942	39.20	-1.30	54.0	-14.80	AV	303.10	100	Vertical	Pass
5	4942.757	53.88	1.43	74.0	-20.12	Peak	202.70	100	Vertical	Pass
5**	4942.757	41.67	1.43	54.0	-12.33	AV	202.70	100	Vertical	Pass
6	6695.538	58.58	5.92	74.0	-15.42	Peak	276.00	100	Vertical	Pass
6**	6695.538	47.66	5.92	54.0	-6.34	AV	276.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_17.19.20

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 20.9

Load: Full load

Hum.: 50

Remark: DR-RSE01-E19110011-05#04

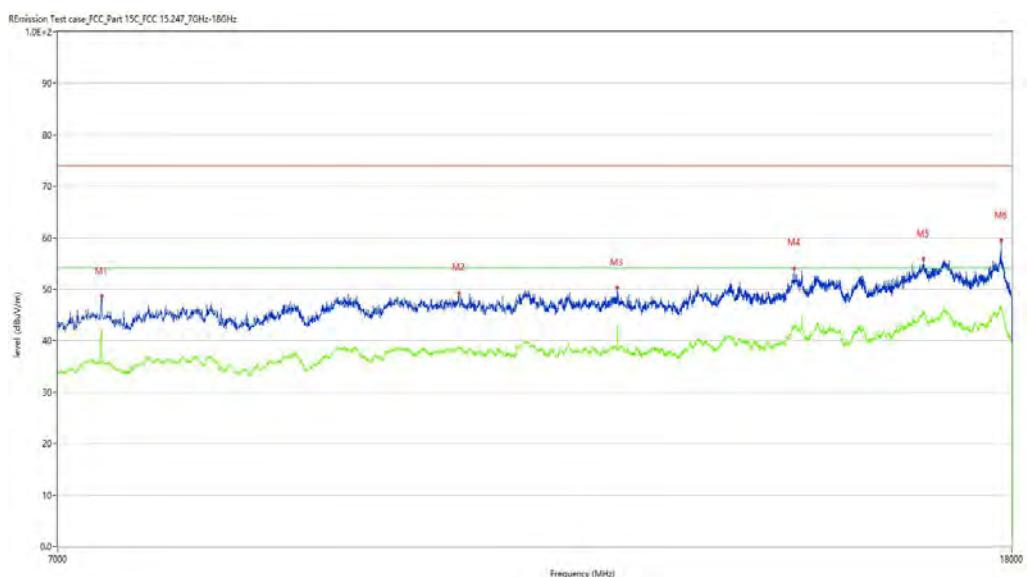


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7310.672	48.59	3.01	74.0	-25.41	Peak	241.30	100	Vertical	Pass
1**	7310.672	42.13	3.01	54.0	-11.87	AV	241.30	100	Vertical	Pass
2	10411.897	49.30	10.80	74.0	-24.70	Peak	149.00	100	Vertical	Pass
2**	10411.897	38.50	10.80	54.0	-15.50	AV	149.00	100	Vertical	Pass
3	12182.454	50.31	10.89	74.0	-23.69	Peak	280.80	100	Vertical	Pass
3**	12182.454	42.86	10.89	54.0	-11.14	AV	280.80	100	Vertical	Pass
4	14513.872	54.12	17.05	74.0	-19.88	Peak	245.40	100	Vertical	Pass
4**	14513.872	42.41	17.05	54.0	-11.59	AV	245.40	100	Vertical	Pass
5	16496.126	55.84	20.74	74.0	-18.16	Peak	289.70	100	Vertical	Pass
5**	16496.126	45.68	20.74	54.0	-8.32	AV	289.70	100	Vertical	Pass
6	17815.796	59.53	20.50	74.0	-14.47	Peak	218.30	100	Vertical	Pass
6**	17815.796	46.21	20.50	54.0	-7.79	AV	218.30	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_15.54.35

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

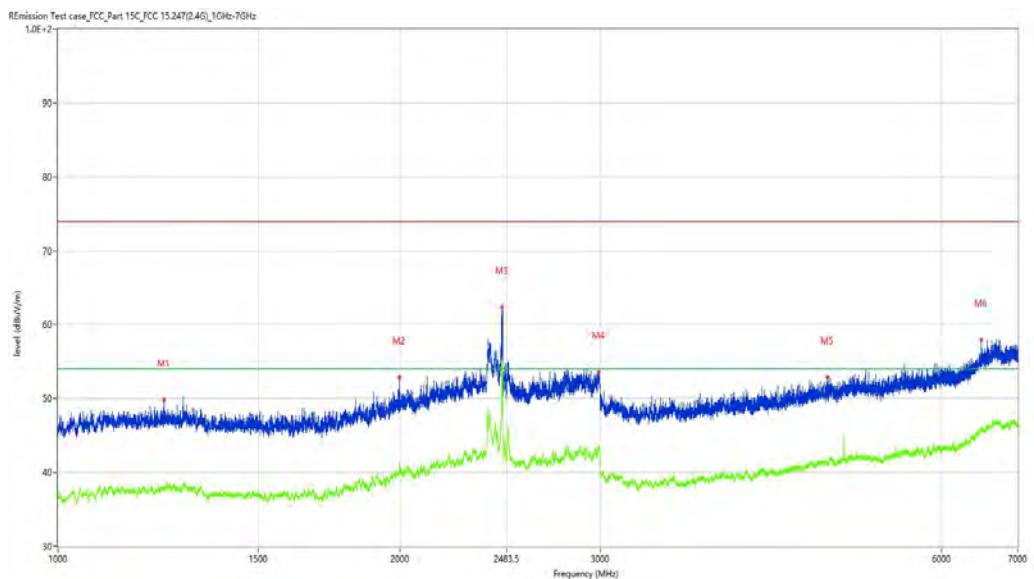


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1239.220	49.81	-4.54	74.0	-24.19	Peak	214.00	100	Horizontal	Pass
1**	1239.220	37.99	-4.54	54.0	-16.01	AV	214.00	100	Horizontal	Pass
2	1999.125	52.84	-2.44	74.0	-21.16	Peak	71.50	100	Horizontal	Pass
2**	1999.125	41.23	-2.44	54.0	-12.77	AV	71.50	100	Horizontal	Pass
3	2459.818	62.37	3.03	74.0	-11.63	Peak	66.70	100	Horizontal	Pass
3**	2459.818	53.61	3.03	54.0	-0.39	AV	66.70	100	Horizontal	Pass
4	2995.251	53.59	2.62	74.0	-20.41	Peak	0.40	100	Horizontal	Pass
4**	2995.251	43.38	2.62	54.0	-10.62	AV	0.40	100	Horizontal	Pass
5	4760.780	52.82	1.02	74.0	-21.18	Peak	113.40	100	Horizontal	Pass
5**	4760.780	41.14	1.02	54.0	-12.86	AV	113.40	100	Horizontal	Pass
6	6504.062	57.92	4.85	74.0	-16.08	Peak	118.30	100	Horizontal	Pass
6**	6504.062	45.70	4.85	54.0	-8.30	AV	118.30	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_18.51.13

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

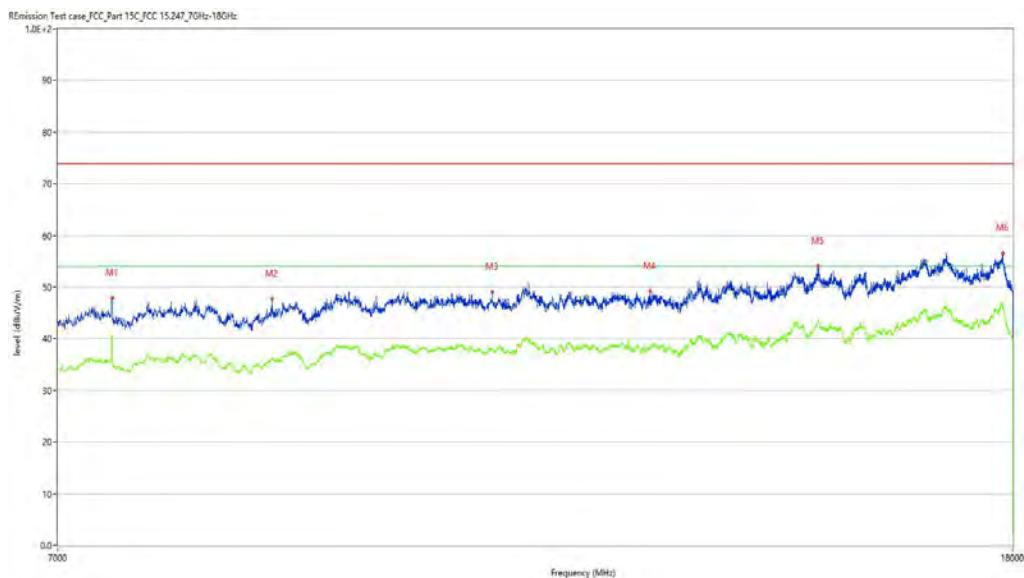


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7387.653	47.84	2.95	74.0	-26.16	Peak	212.90	100	Horizontal	Pass
1**	7387.653	40.01	2.95	54.0	-13.99	AV	212.90	100	Horizontal	Pass
2	8652.337	47.68	5.62	74.0	-26.32	Peak	231.50	100	Horizontal	Pass
2**	8652.337	35.93	5.62	54.0	-18.07	AV	231.50	100	Horizontal	Pass
3	10758.310	49.07	10.58	74.0	-24.93	Peak	102.00	100	Horizontal	Pass
3**	10758.310	38.14	10.58	54.0	-15.86	AV	102.00	100	Horizontal	Pass
4	12575.606	49.20	10.96	74.0	-24.80	Peak	138.90	100	Horizontal	Pass
4**	12575.606	38.17	10.96	54.0	-15.83	AV	138.90	100	Horizontal	Pass
5	14846.538	54.09	18.21	74.0	-19.91	Peak	354.60	100	Horizontal	Pass
5**	14846.538	43.21	18.21	54.0	-10.79	AV	354.60	100	Horizontal	Pass
6	17824.044	56.65	20.19	74.0	-17.35	Peak	48.40	100	Horizontal	Pass
6**	17824.044	45.86	20.19	54.0	-8.14	AV	48.40	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_15.45.53

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

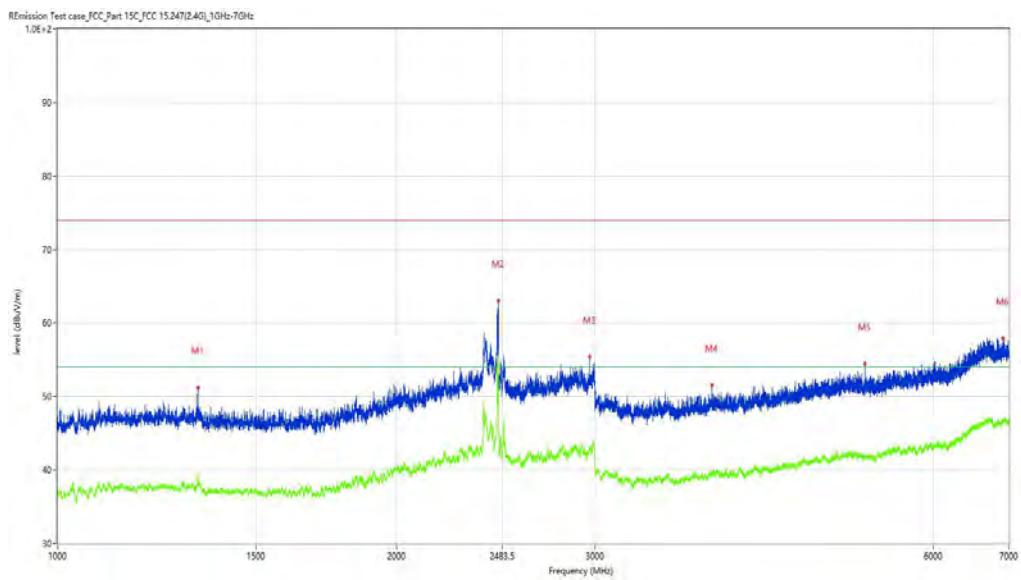

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.958	51.17	-4.42	74.0	-22.83	Peak	278.10	100	Vertical	Pass
1**	1332.958	39.23	-4.42	54.0	-14.77	AV	278.10	100	Vertical	Pass
2	2463.317	63.04	2.90	74.0	-10.96	Peak	217.40	100	Vertical	Pass
2**	2463.317	55.05	2.90	54.0	1.05	AV	217.40	100	Vertical	N.A
3	2970.504	55.41	2.68	74.0	-18.59	Peak	52.90	100	Vertical	Pass
3**	2970.504	43.01	2.68	54.0	-10.99	AV	52.90	100	Vertical	Pass
4	3815.398	51.54	-0.68	74.0	-22.46	Peak	86.40	100	Vertical	Pass
4**	3815.398	39.36	-0.68	54.0	-14.64	AV	86.40	100	Vertical	Pass
5	5213.723	54.45	1.63	74.0	-19.55	Peak	1.10	100	Vertical	Pass
5**	5213.723	41.59	1.63	54.0	-12.41	AV	1.10	100	Vertical	Pass
6	6913.511	57.90	5.74	74.0	-16.10	Peak	248.30	100	Vertical	Pass
6**	6913.511	46.57	5.74	54.0	-7.43	AV	248.30	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_18.02.45

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 20.9

Load: Full load

Hum.: 50

Remark: DR-RSE01-E19110011-05#04

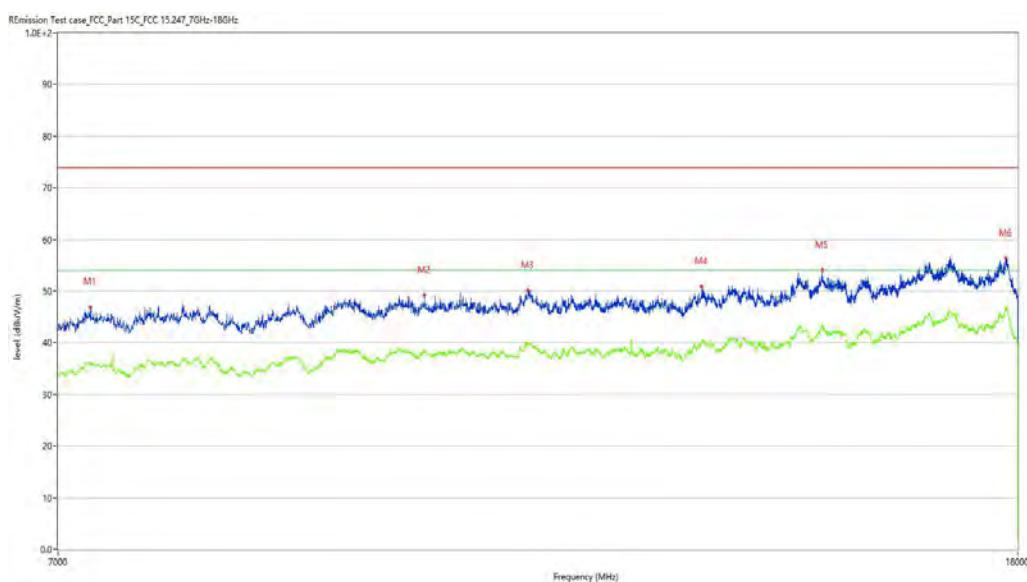

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7228.193	46.89	2.83	74.0	-27.11	Peak	81.50	100	Vertical	Pass
1**	7228.193	36.05	2.83	54.0	-17.95	AV	81.50	100	Vertical	Pass
2	10040.740	49.20	9.75	74.0	-24.80	Peak	67.40	100	Vertical	Pass
2**	10040.740	38.93	9.75	54.0	-15.07	AV	67.40	100	Vertical	Pass
3	11115.721	50.16	10.67	74.0	-23.84	Peak	21.30	100	Vertical	Pass
3**	11115.721	39.64	10.67	54.0	-14.36	AV	21.30	100	Vertical	Pass
4	13191.452	50.92	12.33	74.0	-23.08	Peak	7.90	100	Vertical	Pass
4**	13191.452	40.45	12.33	54.0	-13.55	AV	7.90	100	Vertical	Pass
5	14849.288	54.08	18.24	74.0	-19.92	Peak	349.10	100	Vertical	Pass
5**	14849.288	43.16	18.24	54.0	-10.84	AV	349.10	100	Vertical	Pass
6	17785.554	56.31	21.17	74.0	-17.69	Peak	289.20	100	Vertical	Pass
6**	17785.554	46.35	21.17	54.0	-7.65	AV	289.20	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-09_18.25.23

EUT Name: N.A

Test Engineer: LYT

Manufacture: N.A

Test Standard: FCC

Model Name: N.A


Work Additon: Normal

Templ.(oC): 20.9

Load: Full load

Hum: 50

Remark: DR-RSE01-E19110011-05#04

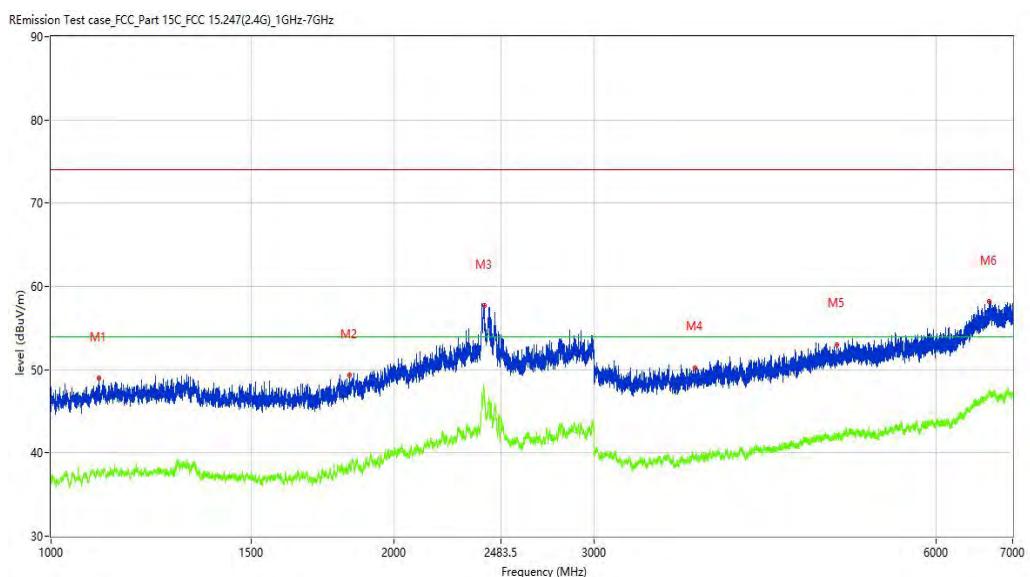


No.	Frequency (MHz)	Results (dBm)	Factor (dB)	Limit (dBm)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1101.987	48.97	-4.20	74.0	-25.03	Peak	62.60	100	Horizontal	Pass
1**	1101.987	37.67	-4.20	54.0	-16.33	AV	62.60	100	Horizontal	Pass
2	1828.396	49.36	-3.69	74.0	-24.64	Peak	331.60	100	Horizontal	Pass
2**	1828.396	38.41	-3.69	54.0	-15.59	AV	331.60	100	Horizontal	Pass
3	2402.075	57.64	5.29	74.0	-16.36	Peak	218.10	100	Horizontal	Pass
3**	2402.075	47.68	5.29	54.0	-6.32	AV	218.10	100	Horizontal	Pass
4	3681.915	50.24	-0.78	74.0	-23.76	Peak	338.50	100	Horizontal	Pass
4**	3681.915	39.58	-0.78	54.0	-14.42	AV	338.50	100	Horizontal	Pass
5	4907.262	53.03	1.29	74.0	-20.97	Peak	40.00	100	Horizontal	Pass
5**	4907.262	42.09	1.29	54.0	-11.91	AV	40.00	100	Horizontal	Pass
6	6676.040	58.13	5.70	74.0	-15.87	Peak	338.50	100	Horizontal	Pass
6**	6676.040	47.64	5.70	54.0	-6.36	AV	338.50	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_18.18.48

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

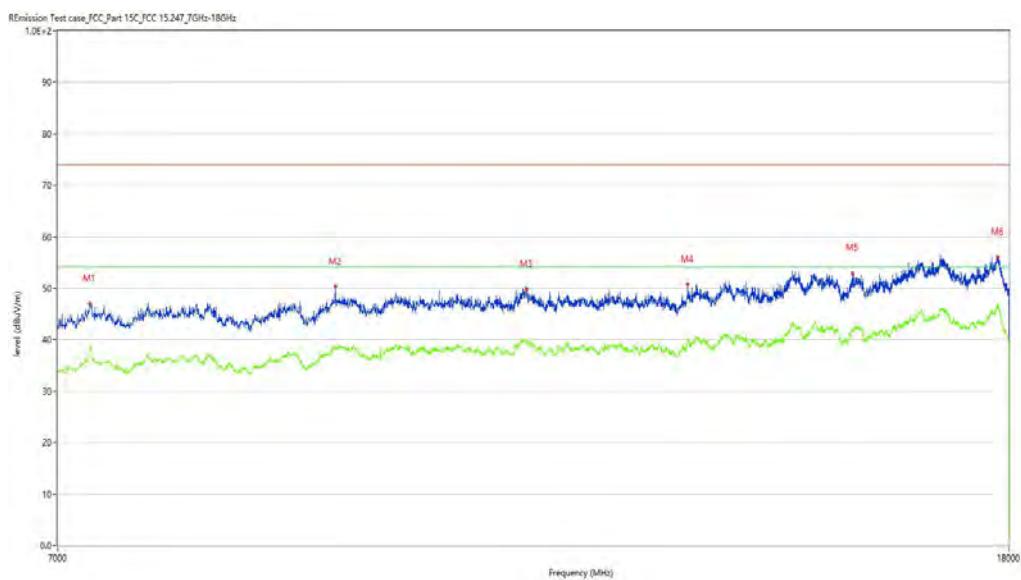

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7206.198	44.69	2.85	74.0	-29.31	Peak	252.30	100	Horizontal	Pass
1**	7206.198	36.18	2.85	54.0	-17.82	AV	252.30	100	Horizontal	Pass
2	9221.445	50.31	8.53	74.0	-23.69	Peak	208.80	100	Horizontal	Pass
2**	9221.445	38.77	8.53	54.0	-15.23	AV	208.80	100	Horizontal	Pass
3	11154.211	49.87	10.82	74.0	-24.13	Peak	230.70	100	Horizontal	Pass
3**	11154.211	39.83	10.82	54.0	-14.17	AV	230.70	100	Horizontal	Pass
4	13086.978	50.73	12.36	74.0	-23.27	Peak	305.10	100	Horizontal	Pass
4**	13086.978	40.06	12.36	54.0	-13.94	AV	305.10	100	Horizontal	Pass
5	15407.398	52.92	15.77	74.0	-21.08	Peak	354.20	100	Horizontal	Pass
5**	15407.398	42.03	15.77	54.0	-11.97	AV	354.20	100	Horizontal	Pass
6	17799.300	56.00	21.10	74.0	-18.00	Peak	178.60	100	Horizontal	Pass
6**	17799.300	47.03	21.10	54.0	-6.97	AV	178.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-09_17.31.53

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 20.9

Load: Full load

Hum.: 50

Remark: DR-RSE01-E19110011-05#04

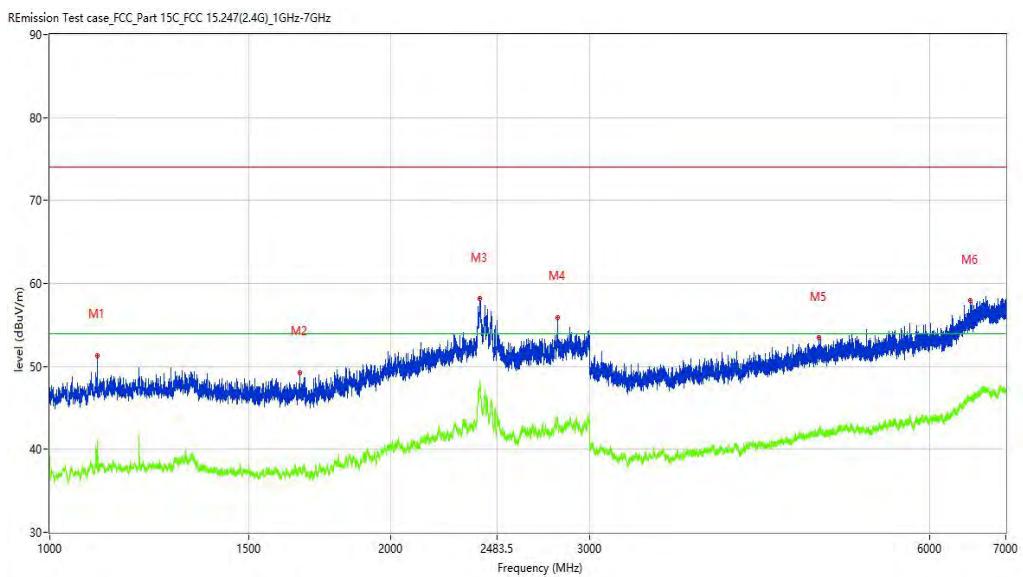

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1100.987	51.31	-4.02	74.0	-22.69	Peak	5.90	100	Vertical	Pass
1**	1100.987	38.68	-4.02	54.0	-15.32	AV	5.90	100	Vertical	Pass
2	1662.667	49.29	-4.86	74.0	-24.71	Peak	29.10	100	Vertical	Pass
2**	1662.667	37.61	-4.86	54.0	-16.39	AV	29.10	100	Vertical	Pass
3	2399.325	58.16	5.40	74.0	-15.84	Peak	0.00	100	Vertical	Pass
3**	2399.325	47.95	5.40	54.0	-6.05	AV	0.00	100	Vertical	Pass
4	2810.524	55.93	2.31	74.0	-18.07	Peak	335.30	100	Vertical	Pass
4**	2810.524	43.74	2.31	54.0	-10.26	AV	335.30	100	Vertical	Pass
5	4785.277	53.48	1.05	74.0	-20.52	Peak	151.70	100	Vertical	Pass
5**	4785.277	42.27	1.05	54.0	-11.73	AV	151.70	100	Vertical	Pass
6	6508.061	57.94	4.85	74.0	-16.06	Peak	79.10	100	Vertical	Pass
6**	6508.061	45.96	4.85	54.0	-8.04	AV	79.10	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_17.07.55

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.9

Load: Full load

Hum.: 50

Remark: DR-RSE01-E19110011-05#04




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7219.945	45.26	2.84	74.0	-28.74	Peak	263.90	100	Vertical	Pass
1**	7219.945	36.02	2.84	54.0	-17.98	AV	263.90	100	Vertical	Pass
2	9372.657	48.54	9.88	74.0	-25.46	Peak	120.60	100	Vertical	Pass
2**	9372.657	38.24	9.88	54.0	-15.76	AV	120.60	100	Vertical	Pass
3	11143.214	49.90	10.80	74.0	-24.10	Peak	319.70	100	Vertical	Pass
3**	11143.214	39.67	10.80	54.0	-14.33	AV	319.70	100	Vertical	Pass
4	13185.954	50.50	12.30	74.0	-23.50	Peak	166.80	100	Vertical	Pass
4**	13185.954	40.12	12.30	54.0	-13.88	AV	166.80	100	Vertical	Pass
5	15542.114	52.55	15.53	74.0	-21.45	Peak	166.80	100	Vertical	Pass
5**	15542.114	42.19	15.53	54.0	-11.81	AV	166.80	100	Vertical	Pass
6	16867.283	57.72	20.32	74.0	-16.28	Peak	337.90	100	Vertical	Pass
6**	16867.283	45.72	20.32	54.0	-8.28	AV	337.90	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_16.13.46

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

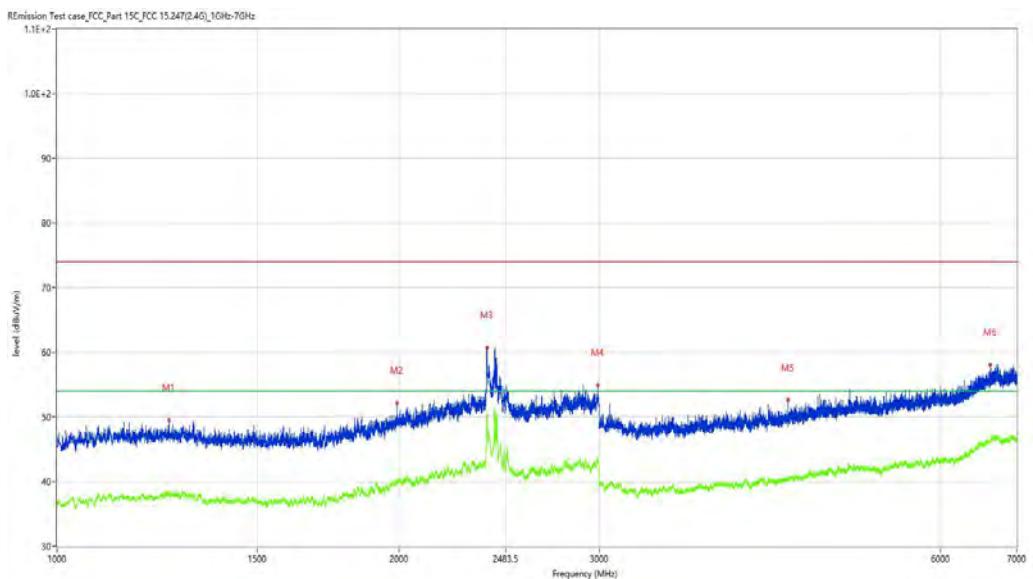

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1254.218	49.53	-4.25	74.0	-24.47	Peak	241.20	100	Horizontal	Pass
1**	1254.218	38.12	-4.25	54.0	-15.88	AV	241.20	100	Horizontal	Pass
2	1993.126	52.21	-2.70	74.0	-21.79	Peak	86.00	100	Horizontal	Pass
2**	1993.126	40.31	-2.70	54.0	-13.69	AV	86.00	100	Horizontal	Pass
3	2391.076	60.76	4.69	74.0	-13.24	Peak	100.20	100	Horizontal	Pass
3**	2391.076	50.26	4.69	54.0	-3.74	AV	100.20	100	Horizontal	Pass
4	2993.251	54.97	2.98	74.0	-19.03	Peak	90.50	100	Horizontal	Pass
4**	2993.251	43.60	2.98	54.0	-10.40	AV	90.50	100	Horizontal	Pass
5	4401.825	52.61	0.37	74.0	-21.39	Peak	203.80	100	Horizontal	Pass
5**	4401.825	40.26	0.37	54.0	-13.74	AV	203.80	100	Horizontal	Pass
6	6630.046	58.12	5.17	74.0	-15.88	Peak	102.20	100	Horizontal	Pass
6**	6630.046	46.31	5.17	54.0	-7.69	AV	102.20	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_18.33.00

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.9

Load: Full load

Hum.: 50

Remark: DR-RSE01-E19110011-05#04




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7316.171	47.16	3.04	74.0	-26.84	Peak	222.10	100	Horizontal	Pass
1**	7316.171	37.76	3.04	54.0	-16.24	AV	222.10	100	Horizontal	Pass
2	9306.673	48.98	9.20	74.0	-25.02	Peak	207.60	100	Horizontal	Pass
2**	9306.673	38.52	9.20	54.0	-15.48	AV	207.60	100	Horizontal	Pass
3	11104.724	49.85	10.61	74.0	-24.15	Peak	42.00	100	Horizontal	Pass
3**	11104.724	40.17	10.61	54.0	-13.83	AV	42.00	100	Horizontal	Pass
4	13331.667	51.14	12.76	74.0	-22.86	Peak	46.50	100	Horizontal	Pass
4**	13331.667	39.72	12.76	54.0	-14.28	AV	46.50	100	Horizontal	Pass
5	15470.632	52.69	15.30	74.0	-21.31	Peak	212.00	100	Horizontal	Pass
5**	15470.632	42.42	15.30	54.0	-11.58	AV	212.00	100	Horizontal	Pass
6	16870.032	57.24	20.29	74.0	-16.76	Peak	97.40	100	Horizontal	Pass
6**	16870.032	45.67	20.29	54.0	-8.33	AV	97.40	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_16.36.04

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

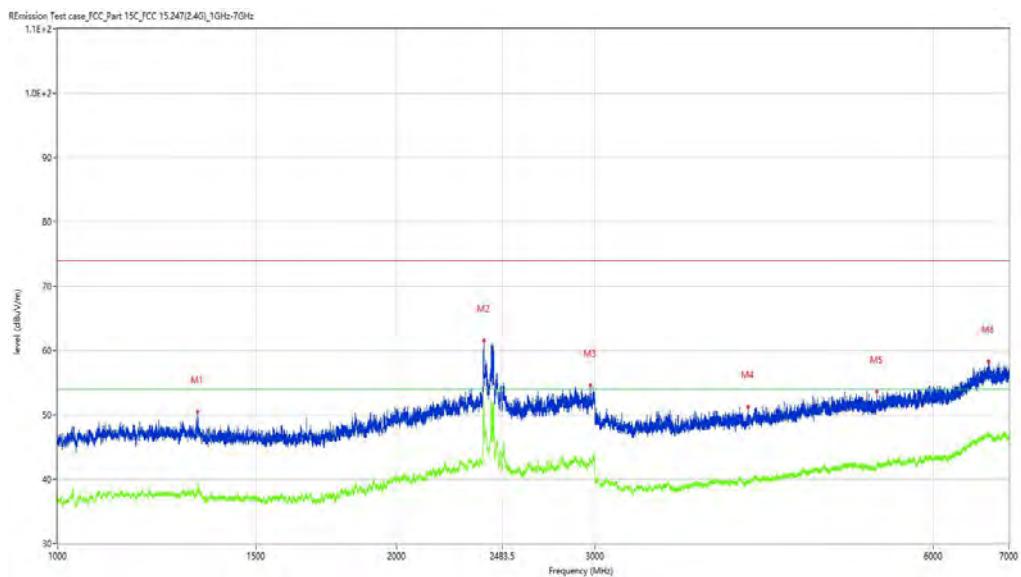

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.208	50.42	-4.50	74.0	-23.58	Peak	286.90	100	Vertical	Pass
1**	1332.208	39.58	-4.50	54.0	-14.42	AV	286.90	100	Vertical	Pass
2	2391.826	61.56	5.16	74.0	-12.44	Peak	225.90	100	Vertical	Pass
2**	2391.826	52.21	5.16	54.0	-1.79	AV	225.90	100	Vertical	Pass
3	2974.253	54.56	2.78	74.0	-19.44	Peak	0.00	100	Vertical	Pass
3**	2974.253	43.19	2.78	54.0	-10.81	AV	0.00	100	Vertical	Pass
4	4103.862	51.24	-0.04	74.0	-22.76	Peak	130.40	100	Vertical	Pass
4**	4103.862	39.58	-0.04	54.0	-14.42	AV	130.40	100	Vertical	Pass
5	5343.707	53.61	1.46	74.0	-20.39	Peak	288.20	100	Vertical	Pass
5**	5343.707	41.99	1.46	54.0	-12.01	AV	288.20	100	Vertical	Pass
6	6716.535	58.29	5.87	74.0	-15.71	Peak	189.20	100	Vertical	Pass
6**	6716.535	46.78	5.87	54.0	-7.22	AV	189.20	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_17.22.38

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.9

Load: Full load

Hum.: 50

Remark: DR-RSE01-E19110011-05#04




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7302.424	46.88	2.97	74.0	-27.12	Peak	244.50	100	Vertical	Pass
1**	7302.424	36.97	2.97	54.0	-17.03	AV	244.50	100	Vertical	Pass
2	9213.197	49.31	8.51	74.0	-24.69	Peak	281.00	100	Vertical	Pass
2**	9213.197	38.38	8.51	54.0	-15.62	AV	281.00	100	Vertical	Pass
3	11123.969	51.22	10.71	74.0	-22.78	Peak	161.50	100	Vertical	Pass
3**	11123.969	39.85	10.71	54.0	-14.15	AV	161.50	100	Vertical	Pass
4	13628.593	51.58	14.24	74.0	-22.42	Peak	43.60	100	Vertical	Pass
4**	13628.593	40.61	14.24	54.0	-13.39	AV	43.60	100	Vertical	Pass
5	15462.384	52.52	15.29	74.0	-21.48	Peak	115.70	100	Vertical	Pass
5**	15462.384	41.93	15.29	54.0	-12.07	AV	115.70	100	Vertical	Pass
6	17758.060	56.38	21.29	74.0	-17.62	Peak	263.10	100	Vertical	Pass
6**	17758.060	45.32	21.29	54.0	-8.68	AV	263.10	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_16.26.15

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

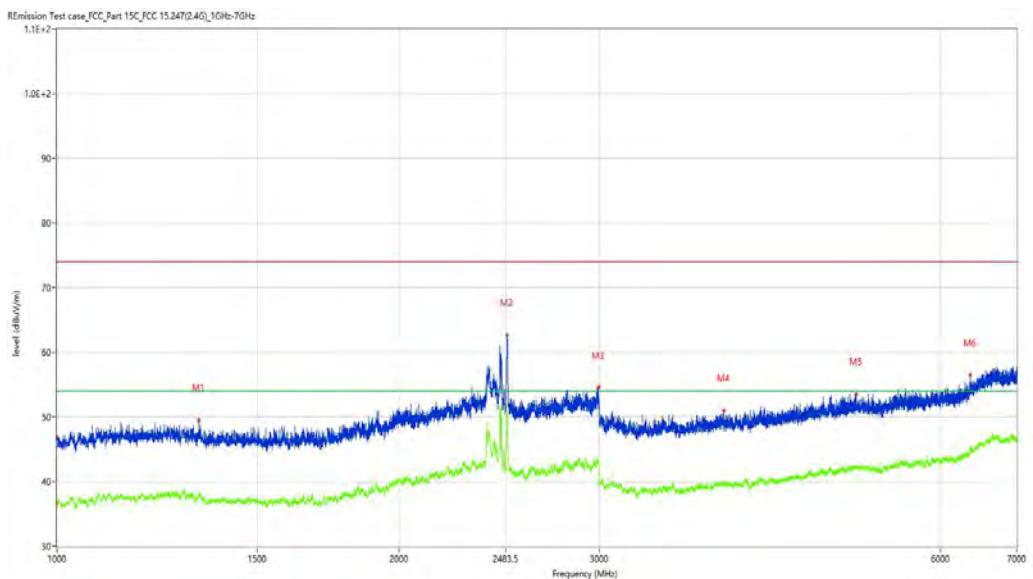

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.958	49.58	-4.42	74.0	-24.42	Peak	264.80	100	Horizontal	Pass
1**	1332.958	38.49	-4.42	54.0	-15.51	AV	264.80	100	Horizontal	Pass
2	2490.314	62.71	1.84	74.0	-11.29	Peak	293.10	100	Horizontal	Pass
2**	2490.314	52.52	1.84	54.0	-1.48	AV	293.10	100	Horizontal	Pass
3	2999.250	54.57	2.29	74.0	-19.43	Peak	100.50	100	Horizontal	Pass
3**	2999.250	43.01	2.29	54.0	-10.99	AV	100.50	100	Horizontal	Pass
4	3863.892	50.97	-0.48	74.0	-23.03	Peak	316.50	100	Horizontal	Pass
4**	3863.892	40.03	-0.48	54.0	-13.97	AV	316.50	100	Horizontal	Pass
5	5057.743	53.51	1.72	74.0	-20.49	Peak	104.80	100	Horizontal	Pass
5**	5057.743	42.06	1.72	54.0	-11.94	AV	104.80	100	Horizontal	Pass
6	6373.578	56.47	3.80	74.0	-17.53	Peak	357.90	100	Horizontal	Pass
6**	6373.578	45.01	3.80	54.0	-8.99	AV	357.90	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_18.54.16

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 20.9

Load: Full load

Hum.: 50

Remark: DR-RSE01-E19110011-05#04

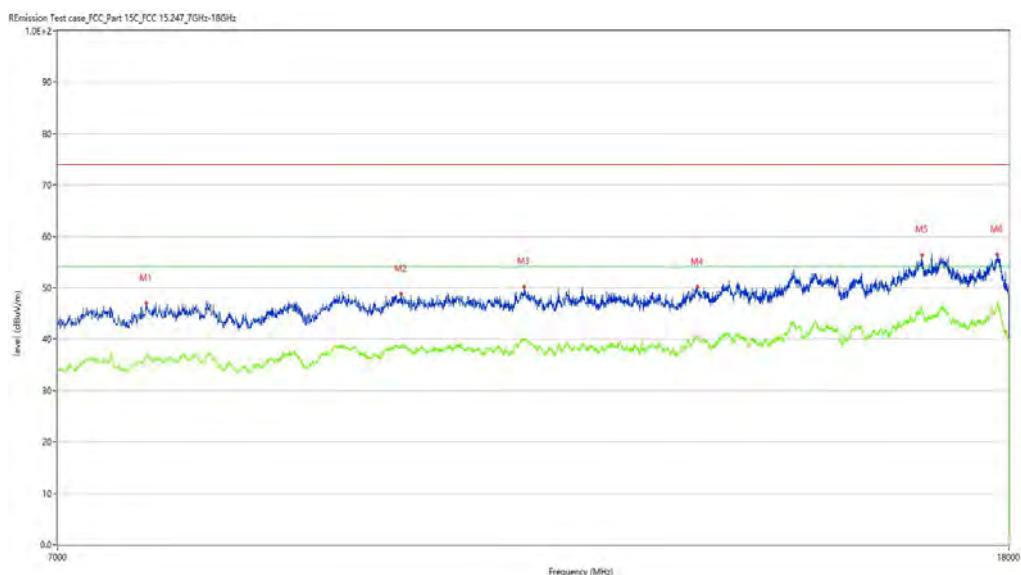


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7643.339	46.93	4.58	74.0	-27.07	Peak	255.70	100	Horizontal	Pass
1**	7643.339	36.51	4.58	54.0	-17.49	AV	255.70	100	Horizontal	Pass
2	9848.288	48.77	9.46	74.0	-25.23	Peak	301.90	100	Horizontal	Pass
2**	9848.288	38.43	9.46	54.0	-15.57	AV	301.90	100	Horizontal	Pass
3	11123.969	50.21	10.71	74.0	-23.79	Peak	360.00	100	Horizontal	Pass
3**	11123.969	39.83	10.71	54.0	-14.17	AV	360.00	100	Horizontal	Pass
4	13210.697	50.12	12.36	74.0	-23.88	Peak	330.50	100	Horizontal	Pass
4**	13210.697	40.57	12.36	54.0	-13.43	AV	330.50	100	Horizontal	Pass
5	16512.622	56.32	20.31	74.0	-17.68	Peak	223.70	100	Horizontal	Pass
5**	16512.622	45.55	20.31	54.0	-8.45	AV	223.70	100	Horizontal	Pass
6	17791.052	56.46	21.14	74.0	-17.54	Peak	297.00	100	Horizontal	Pass
6**	17791.052	47.16	21.14	54.0	-6.84	AV	297.00	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_16.45.27

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

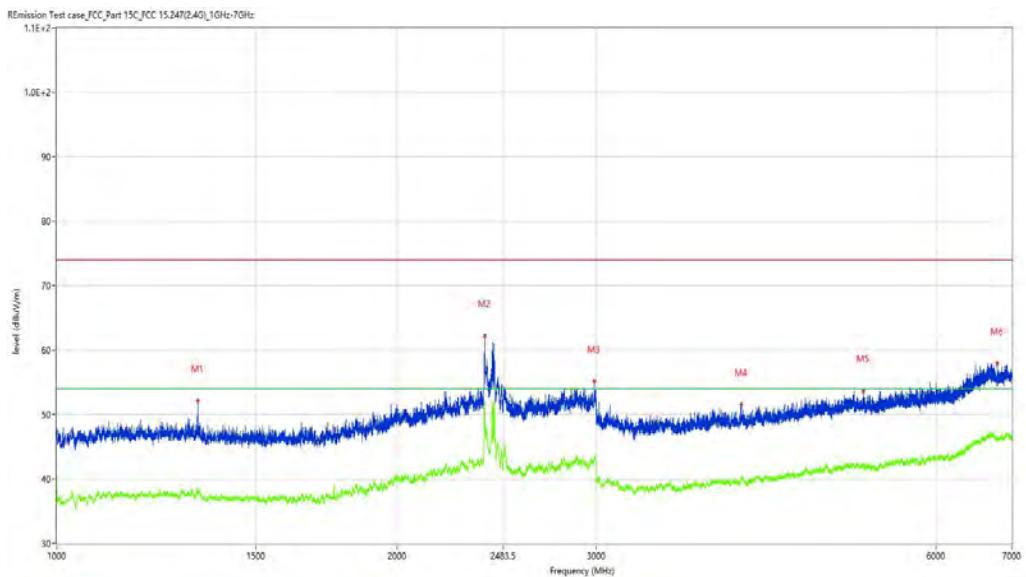

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.208	52.11	-4.40	74.0	-21.89	Peak	285.80	100	Vertical	Pass
1**	1333.208	38.84	-4.40	54.0	-15.16	AV	285.80	100	Vertical	Pass
2	2392.076	62.22	5.32	74.0	-11.78	Peak	229.20	100	Vertical	Pass
2**	2392.076	51.74	5.32	54.0	-2.26	AV	229.20	100	Vertical	Pass
3	2990.501	55.17	3.11	74.0	-18.83	Peak	133.70	100	Vertical	Pass
3**	2990.501	43.62	3.11	54.0	-10.38	AV	133.70	100	Vertical	Pass
4	4032.371	51.53	-0.11	74.0	-22.47	Peak	164.30	100	Vertical	Pass
4**	4032.371	40.07	-0.11	54.0	-13.93	AV	164.30	100	Vertical	Pass
5	5174.728	53.63	1.69	74.0	-20.37	Peak	269.60	100	Vertical	Pass
5**	5174.728	42.06	1.69	54.0	-11.94	AV	269.60	100	Vertical	Pass
6	6792.526	57.93	5.42	74.0	-16.07	Peak	306.90	100	Vertical	Pass
6**	6792.526	46.21	5.42	54.0	-7.79	AV	306.90	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_18.06.22

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 20.9

Load: Full load

Hum.: 50

Remark: DR-RSE01-E19110011-05#04

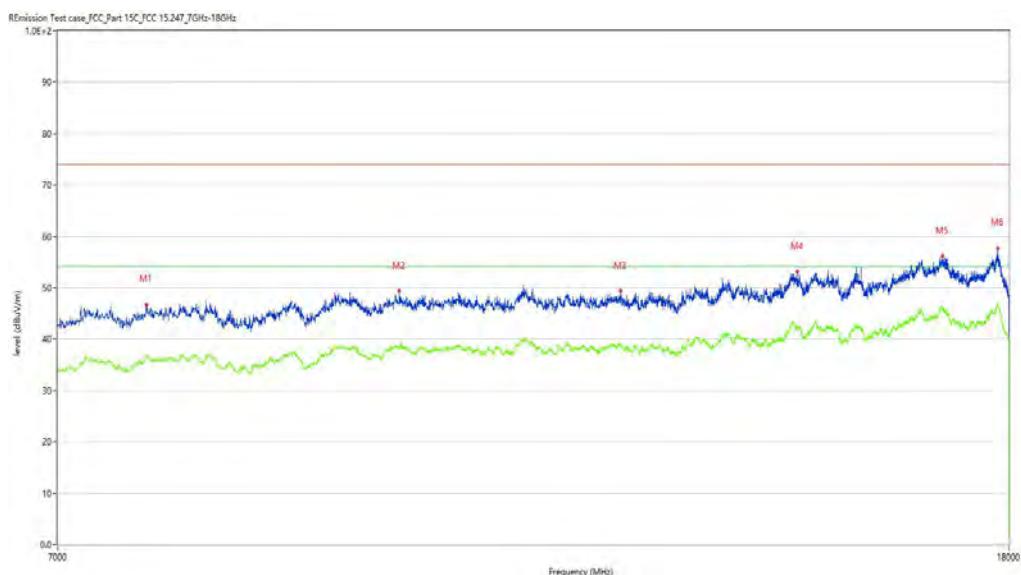


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7646.088	46.75	4.64	74.0	-27.25	Peak	19.80	100	Vertical	Pass
1**	7646.088	36.44	4.64	54.0	-17.56	AV	19.80	100	Vertical	Pass
2	9829.043	49.34	9.52	74.0	-24.66	Peak	5.90	100	Vertical	Pass
2**	9829.043	38.42	9.52	54.0	-15.58	AV	5.90	100	Vertical	Pass
3	12242.939	49.39	11.06	74.0	-24.61	Peak	166.00	100	Vertical	Pass
3**	12242.939	39.05	11.06	54.0	-14.95	AV	166.00	100	Vertical	Pass
4	14593.602	53.20	17.05	74.0	-20.80	Peak	61.40	100	Vertical	Pass
4**	14593.602	42.19	17.05	54.0	-11.81	AV	61.40	100	Vertical	Pass
5	16853.537	56.22	20.46	74.0	-17.78	Peak	107.90	100	Vertical	Pass
5**	16853.537	46.28	20.46	54.0	-7.72	AV	107.90	100	Vertical	Pass
6	17796.551	57.73	21.12	74.0	-16.27	Peak	337.50	100	Vertical	Pass
6**	17796.551	46.90	21.12	54.0	-7.10	AV	337.50	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-09_18.18.48

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

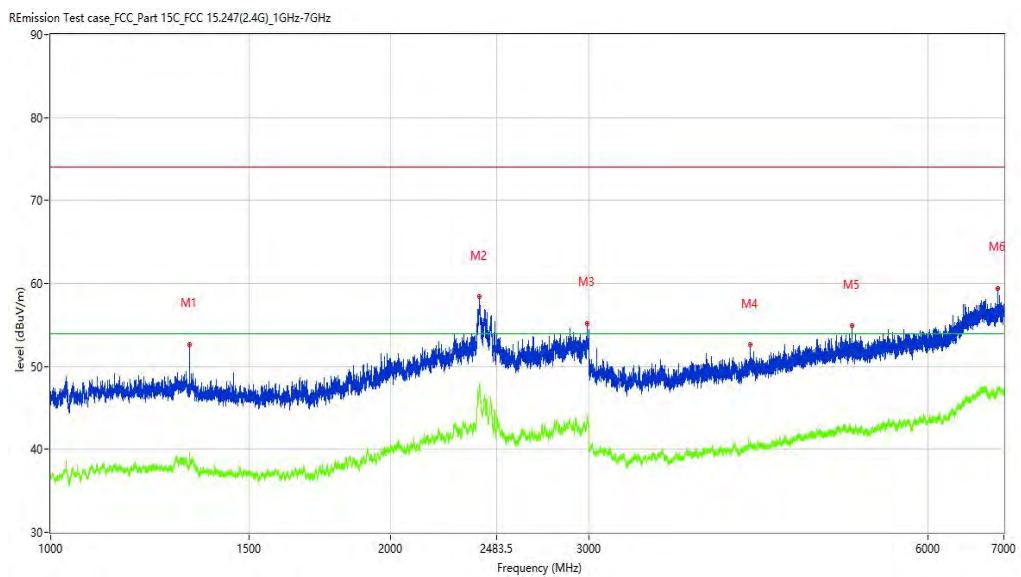

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.709	52.68	-4.88	74.0	-21.32	Peak	295.40	100	Horizontal	Pass
1**	1328.709	39.74	-4.88	54.0	-14.26	AV	295.40	100	Horizontal	Pass
2	2398.825	58.38	5.42	74.0	-15.62	Peak	0.00	100	Horizontal	Pass
2**	2398.825	47.58	5.42	54.0	-6.42	AV	0.00	100	Horizontal	Pass
3	2991.251	55.18	3.15	74.0	-18.82	Peak	75.70	100	Horizontal	Pass
3**	2991.251	43.73	3.15	54.0	-10.27	AV	75.70	100	Horizontal	Pass
4	4173.353	52.61	-0.04	74.0	-21.39	Peak	32.90	100	Horizontal	Pass
4**	4173.353	40.80	-0.04	54.0	-13.20	AV	32.90	100	Horizontal	Pass
5	5134.733	54.87	1.73	74.0	-19.13	Peak	19.20	100	Horizontal	Pass
5**	5134.733	42.18	1.73	54.0	-11.82	AV	19.20	100	Horizontal	Pass
6	6918.510	59.44	5.73	74.0	-14.56	Peak	357.90	100	Horizontal	Pass
6**	6918.510	47.57	5.73	54.0	-6.43	AV	357.90	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_18.22.40

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 20.9

Load: Full load

Hum.: 50

Remark: DR-RSE01-E19110011-05#04

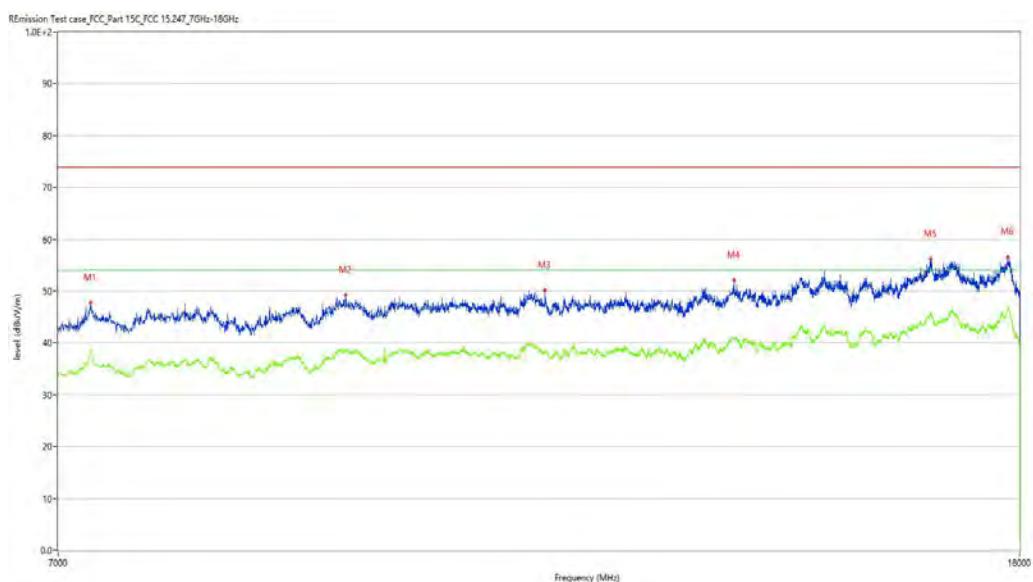

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7208.948	45.10	2.85	74.0	-28.90	Peak	220.70	100	Horizontal	Pass
1**	7208.948	35.97	2.85	54.0	-18.03	AV	220.70	100	Horizontal	Pass
2	9284.679	49.26	8.96	74.0	-24.74	Peak	285.10	100	Horizontal	Pass
2**	9284.679	38.69	8.96	54.0	-15.31	AV	285.10	100	Horizontal	Pass
3	11294.426	50.18	10.77	74.0	-23.82	Peak	174.90	100	Horizontal	Pass
3**	11294.426	38.03	10.77	54.0	-15.97	AV	174.90	100	Horizontal	Pass
4	13598.350	52.04	14.62	74.0	-21.96	Peak	354.30	100	Horizontal	Pass
4**	13598.350	40.98	14.62	54.0	-13.02	AV	354.30	100	Horizontal	Pass
5	16498.875	56.15	20.80	74.0	-17.85	Peak	243.80	100	Horizontal	Pass
5**	16498.875	45.78	20.80	54.0	-8.22	AV	243.80	100	Horizontal	Pass
6	17793.802	56.59	21.13	74.0	-17.41	Peak	326.80	100	Horizontal	Pass
6**	17793.802	46.65	21.13	54.0	-7.35	AV	326.80	100	Horizontal	Pass


WIFI2.4G-N-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2020-01-09_17.36.50

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

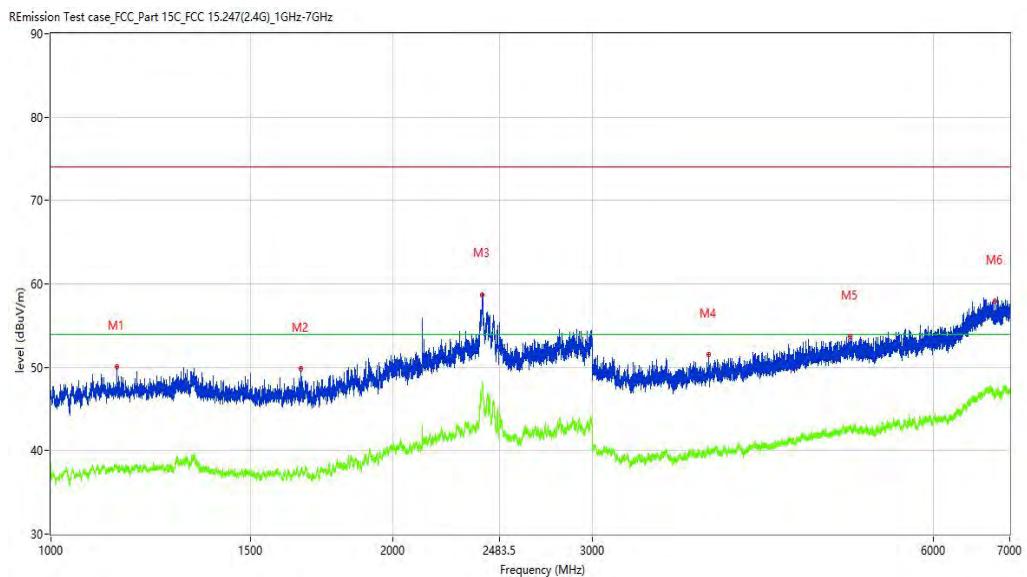


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1143.232	50.06	-4.17	74.0	-23.94	Peak	5.90	100	Vertical	Pass
1**	1143.232	38.20	-4.17	54.0	-15.80	AV	5.90	100	Vertical	Pass
2	1659.918	49.82	-5.07	74.0	-24.18	Peak	52.50	100	Vertical	Pass
2**	1659.918	37.90	-5.07	54.0	-16.10	AV	52.50	100	Vertical	Pass
3	2399.575	58.63	5.39	74.0	-15.37	Peak	0.00	100	Vertical	Pass
3**	2399.575	48.23	5.39	54.0	-5.77	AV	0.00	100	Vertical	Pass
4	3798.900	51.53	-0.74	74.0	-22.47	Peak	271.90	100	Vertical	Pass
4**	3798.900	39.97	-0.74	54.0	-14.03	AV	271.90	100	Vertical	Pass
5	5061.742	53.74	1.72	74.0	-20.26	Peak	290.50	100	Vertical	Pass
5**	5061.742	42.73	1.72	54.0	-11.27	AV	290.50	100	Vertical	Pass
6	6797.525	57.96	5.39	74.0	-16.04	Peak	351.50	100	Vertical	Pass
6**	6797.525	47.00	5.39	54.0	-7.00	AV	351.50	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_17.11.15

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

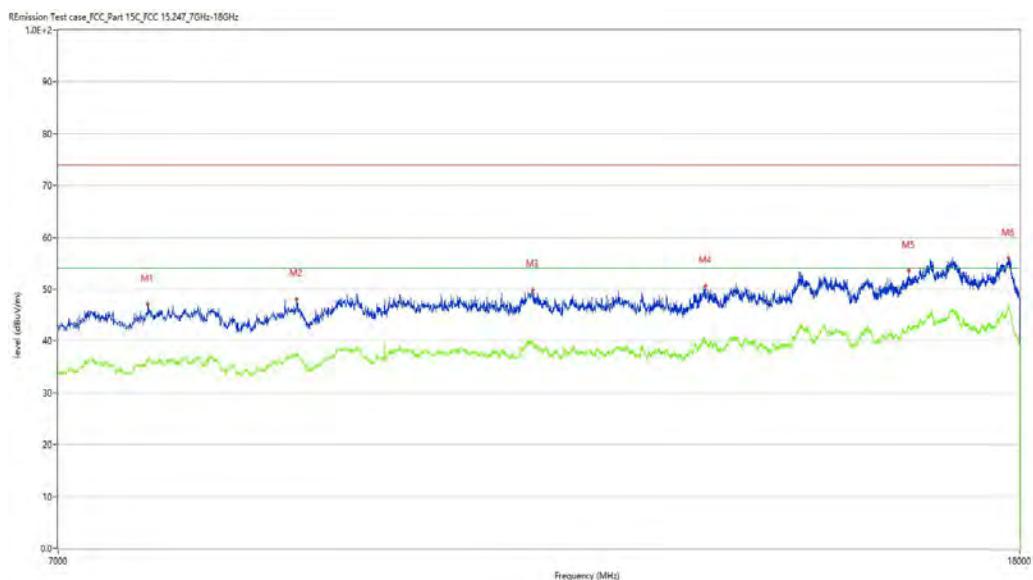

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7646.088	47.17	4.64	74.0	-26.83	Peak	250.10	100	Vertical	Pass
1**	7646.088	36.37	4.64	54.0	-17.63	AV	250.10	100	Vertical	Pass
2	8847.538	48.11	7.52	74.0	-25.89	Peak	173.10	100	Vertical	Pass
2**	8847.538	37.65	7.52	54.0	-16.35	AV	173.10	100	Vertical	Pass
3	11159.710	49.81	10.81	74.0	-24.19	Peak	268.70	100	Vertical	Pass
3**	11159.710	39.95	10.81	54.0	-14.05	AV	268.70	100	Vertical	Pass
4	13221.695	50.65	12.35	74.0	-23.35	Peak	177.60	100	Vertical	Pass
4**	13221.695	40.05	12.35	54.0	-13.95	AV	177.60	100	Vertical	Pass
5	16144.214	53.62	17.59	74.0	-20.38	Peak	286.60	100	Vertical	Pass
5**	16144.214	42.53	17.59	54.0	-11.47	AV	286.60	100	Vertical	Pass
6	17799.300	56.02	21.10	74.0	-17.98	Peak	195.80	100	Vertical	Pass
6**	17799.300	46.57	21.10	54.0	-7.43	AV	195.80	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_16.18.25

EUT Name:

N.A

Test Engineer:

LYT

Manufacturer:

N.A

Test Standard:

FCC

Model:

N.A

Work Addition:

Normal

Temp.(oC):

20.9

Load:


Full load

Hum.:

50

Remark:

DR-RSE01-E19110011-05#04

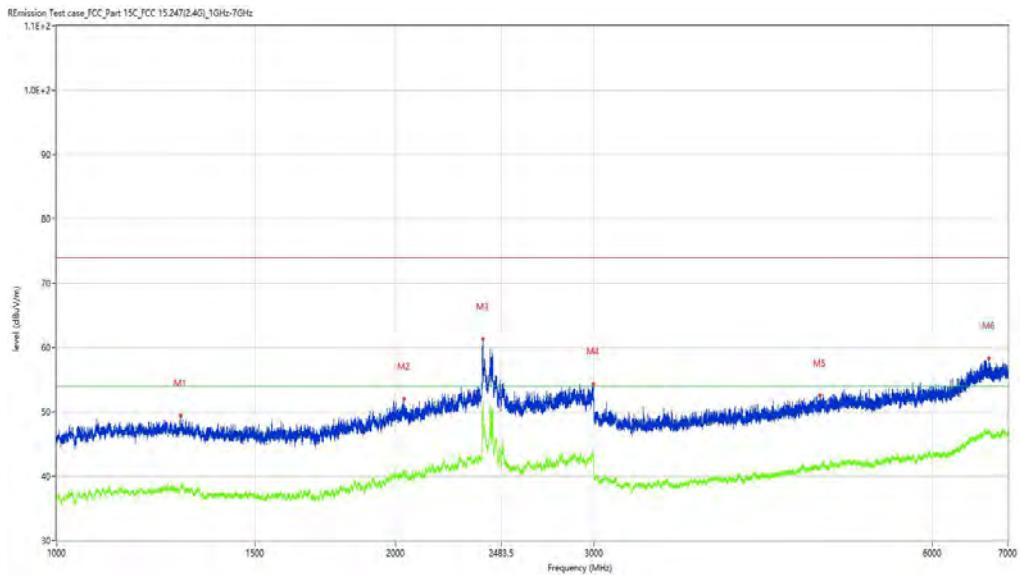

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1289.714	49.42	-4.31	74.0	-24.58	Peak	94.90	100	Horizontal	Pass
1**	1289.714	38.19	-4.31	54.0	-15.81	AV	94.90	100	Horizontal	Pass
2	2034.621	52.07	-1.66	74.0	-21.93	Peak	212.50	100	Horizontal	Pass
2**	2034.621	40.55	-1.66	54.0	-13.45	AV	212.50	100	Horizontal	Pass
3	2391.576	61.36	5.00	74.0	-12.64	Peak	326.00	100	Horizontal	Pass
3**	2391.576	51.59	5.00	54.0	-2.41	AV	326.00	100	Horizontal	Pass
4	2999.250	54.34	2.29	74.0	-19.66	Peak	359.50	100	Horizontal	Pass
4**	2999.250	42.89	2.29	54.0	-11.11	AV	359.50	100	Horizontal	Pass
5	4766.779	52.57	1.03	74.0	-21.43	Peak	126.00	100	Horizontal	Pass
5**	4766.779	41.15	1.03	54.0	-12.85	AV	126.00	100	Horizontal	Pass
6	6730.534	58.36	5.79	74.0	-15.64	Peak	209.70	100	Horizontal	Pass
6**	6730.534	46.87	5.79	54.0	-7.13	AV	209.70	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_18.37.15

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7305.174	47.54	2.98	74.0	-26.46	Peak	216.20	100	Horizontal	Pass
1**	7305.174	38.03	2.98	54.0	-15.97	AV	216.20	100	Horizontal	Pass
2	9402.899	48.70	9.89	74.0	-25.30	Peak	21.60	100	Horizontal	Pass
2**	9402.899	38.21	9.89	54.0	-15.79	AV	21.60	100	Horizontal	Pass
3	11123.969	49.99	10.71	74.0	-24.01	Peak	332.00	100	Horizontal	Pass
3**	11123.969	39.81	10.71	54.0	-14.19	AV	332.00	100	Horizontal	Pass
4	13210.697	50.45	12.36	74.0	-23.55	Peak	323.10	100	Horizontal	Pass
4**	13210.697	40.50	12.36	54.0	-13.50	AV	323.10	100	Horizontal	Pass
5	16498.875	55.38	20.80	74.0	-18.62	Peak	77.40	100	Horizontal	Pass
5**	16498.875	45.75	20.80	54.0	-8.25	AV	77.40	100	Horizontal	Pass
6	17802.049	56.75	21.02	74.0	-17.25	Peak	299.60	100	Horizontal	Pass
6**	17802.049	46.48	21.02	54.0	-7.52	AV	299.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_16.40.47

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

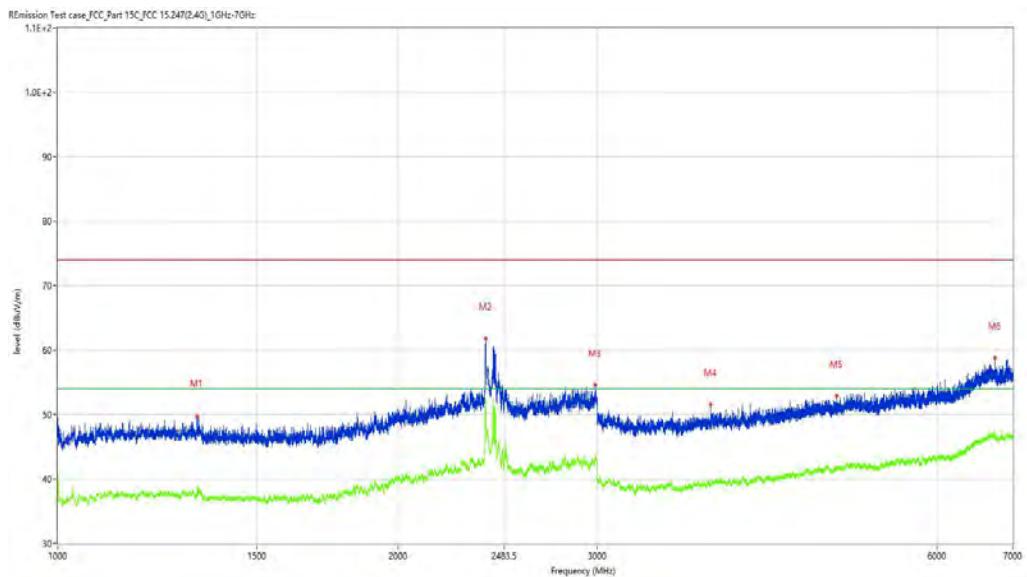

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.459	49.80	-4.90	74.0	-24.20	Peak	218.80	100	Vertical	Pass
1**	1328.459	38.16	-4.90	54.0	-15.84	AV	218.80	100	Vertical	Pass
2	2391.326	61.78	4.85	74.0	-12.22	Peak	223.70	100	Vertical	Pass
2**	2391.326	52.49	4.85	54.0	-1.51	AV	223.70	100	Vertical	Pass
3	2990.251	54.57	3.09	74.0	-19.43	Peak	44.30	100	Vertical	Pass
3**	2990.251	43.40	3.09	54.0	-10.60	AV	44.30	100	Vertical	Pass
4	3784.902	51.54	-0.74	74.0	-22.46	Peak	360.00	100	Vertical	Pass
4**	3784.902	39.24	-0.74	54.0	-14.76	AV	360.00	100	Vertical	Pass
5	4891.264	52.86	1.24	74.0	-21.14	Peak	334.70	100	Vertical	Pass
5**	4891.264	41.70	1.24	54.0	-12.30	AV	334.70	100	Vertical	Pass
6	6752.031	58.75	5.66	74.0	-15.25	Peak	339.60	100	Vertical	Pass
6**	6752.031	46.53	5.66	54.0	-7.47	AV	339.60	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_17.25.59

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 20.9

Load: Full load

Hum.: 50

Remark: DR-RSE01-E19110011-05#04

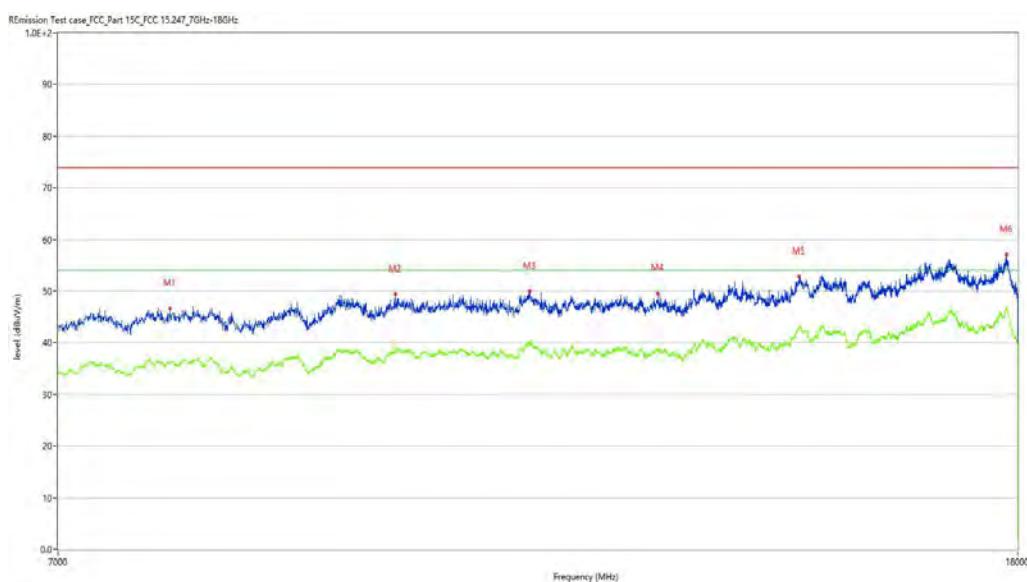


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7816.546	46.68	4.75	74.0	-27.32	Peak	219.60	100	Vertical	Pass
1**	7816.546	35.85	4.75	54.0	-18.15	AV	219.60	100	Vertical	Pass
2	9754.811	49.36	9.70	74.0	-24.64	Peak	141.10	100	Vertical	Pass
2**	9754.811	38.27	9.70	54.0	-15.73	AV	141.10	100	Vertical	Pass
3	11140.465	49.96	10.78	74.0	-24.04	Peak	192.10	100	Vertical	Pass
3**	11140.465	39.90	10.78	54.0	-14.10	AV	192.10	100	Vertical	Pass
4	12630.592	49.62	11.40	74.0	-24.38	Peak	261.30	100	Vertical	Pass
4**	12630.592	39.13	11.40	54.0	-14.87	AV	261.30	100	Vertical	Pass
5	14513.872	52.87	17.05	74.0	-21.13	Peak	0.00	100	Vertical	Pass
5**	14513.872	42.53	17.05	54.0	-11.47	AV	0.00	100	Vertical	Pass
6	17799.300	57.11	21.10	74.0	-16.89	Peak	99.50	100	Vertical	Pass
6**	17799.300	46.56	21.10	54.0	-7.44	AV	99.50	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_16.31.02

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

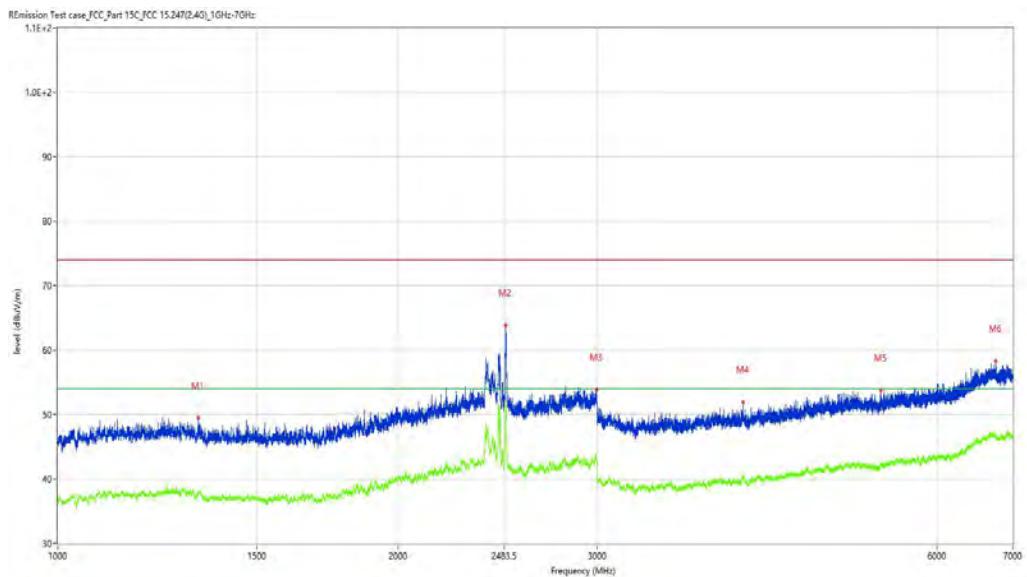

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.208	49.47	-4.50	74.0	-24.53	Peak	137.70	100	Horizontal	Pass
1**	1332.208	37.59	-4.50	54.0	-16.41	AV	137.70	100	Horizontal	Pass
2	2490.564	63.87	1.83	74.0	-10.13	Peak	279.50	100	Horizontal	Pass
2**	2490.564	52.11	1.83	54.0	-1.89	AV	279.50	100	Horizontal	Pass
3	2997.250	53.80	2.31	74.0	-20.20	Peak	81.20	100	Horizontal	Pass
3**	2997.250	43.05	2.31	54.0	-10.95	AV	81.20	100	Horizontal	Pass
4	4039.370	51.95	-0.10	74.0	-22.05	Peak	65.70	100	Horizontal	Pass
4**	4039.370	40.30	-0.10	54.0	-13.70	AV	65.70	100	Horizontal	Pass
5	5351.206	53.77	1.46	74.0	-20.23	Peak	255.10	100	Horizontal	Pass
5**	5351.206	42.29	1.46	54.0	-11.71	AV	255.10	100	Horizontal	Pass
6	6760.030	58.36	5.62	74.0	-15.64	Peak	357.50	100	Horizontal	Pass
6**	6760.030	46.50	5.62	54.0	-7.50	AV	357.50	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_18.57.56

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 20.9

Load: Full load

Hum.: 50

Remark: DR-RSE01-E19110011-05#04

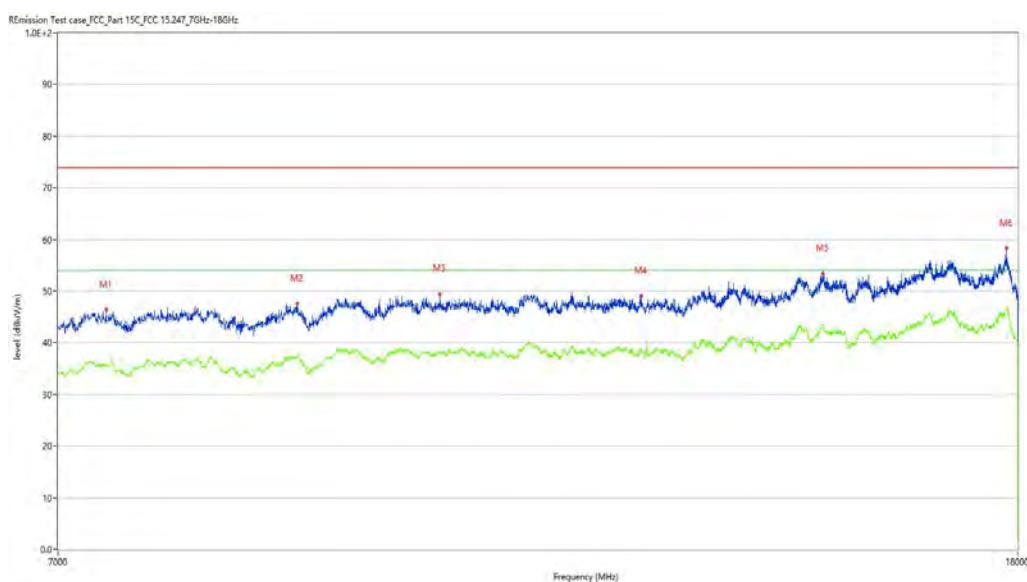


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7340.915	46.40	3.15	74.0	-27.60	Peak	285.40	100	Horizontal	Pass
1**	7340.915	35.54	3.15	54.0	-18.46	AV	285.40	100	Horizontal	Pass
2	8861.285	47.54	7.32	74.0	-26.46	Peak	216.60	100	Horizontal	Pass
2**	8861.285	37.37	7.32	54.0	-16.63	AV	216.60	100	Horizontal	Pass
3	10194.701	49.45	10.45	74.0	-24.55	Peak	294.40	100	Horizontal	Pass
3**	10194.701	38.50	10.45	54.0	-15.50	AV	294.40	100	Horizontal	Pass
4	12424.394	49.12	10.24	74.0	-24.88	Peak	87.90	100	Horizontal	Pass
4**	12424.394	38.24	10.24	54.0	-15.76	AV	87.90	100	Horizontal	Pass
5	14863.034	53.41	17.96	74.0	-20.59	Peak	10.50	100	Horizontal	Pass
5**	14863.034	43.17	17.96	54.0	-10.83	AV	10.50	100	Horizontal	Pass
6	17804.799	58.30	20.92	74.0	-15.70	Peak	15.30	100	Horizontal	Pass
6**	17804.799	46.83	20.92	54.0	-7.17	AV	15.30	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_16.50.06

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

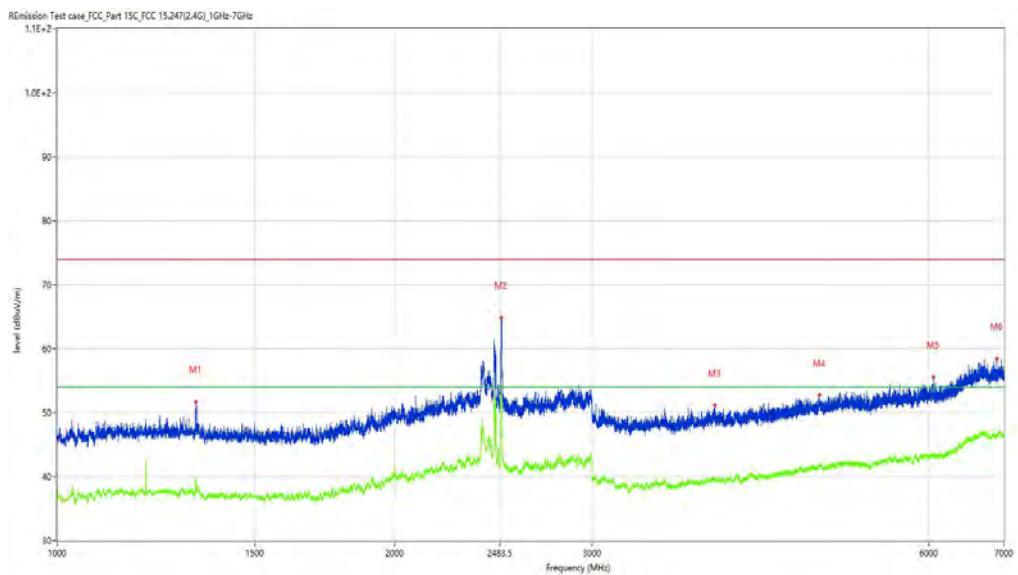

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.959	51.71	-4.86	74.0	-22.29	Peak	283.80	100	Vertical	Pass
1**	1328.959	39.71	-4.86	54.0	-14.29	AV	283.80	100	Vertical	Pass
2	2491.564	64.84	1.79	74.0	-9.16	Peak	227.70	100	Vertical	Pass
2**	2491.564	53.76	1.79	54.0	-0.24	AV	227.70	100	Vertical	Pass
3	3863.392	51.20	-0.49	74.0	-22.80	Peak	41.10	100	Vertical	Pass
3**	3863.392	39.73	-0.49	54.0	-14.27	AV	41.10	100	Vertical	Pass
4	4791.776	52.82	1.05	74.0	-21.18	Peak	226.50	100	Vertical	Pass
4**	4791.776	42.07	1.05	54.0	-11.93	AV	226.50	100	Vertical	Pass
5	6050.619	55.59	2.63	74.0	-18.41	Peak	125.20	100	Vertical	Pass
5**	6050.619	43.44	2.63	54.0	-10.56	AV	125.20	100	Vertical	Pass
6	6897.013	58.46	5.75	74.0	-15.54	Peak	184.40	100	Vertical	Pass
6**	6897.013	46.67	5.75	54.0	-7.33	AV	184.40	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_18.09.59

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7648.838	46.16	4.69	74.0	-27.84	Peak	62.20	100	Vertical	Pass
1**	7648.838	37.07	4.69	54.0	-16.93	AV	62.20	100	Vertical	Pass
2	9235.191	49.80	8.57	74.0	-24.20	Peak	39.10	100	Vertical	Pass
2**	9235.191	38.42	8.57	54.0	-15.58	AV	39.10	100	Vertical	Pass
3	11112.972	50.76	10.65	74.0	-23.24	Peak	12.70	100	Vertical	Pass
3**	11112.972	39.64	10.65	54.0	-14.36	AV	12.70	100	Vertical	Pass
4	13584.604	51.44	14.49	74.0	-22.56	Peak	233.70	100	Vertical	Pass
4**	13584.604	41.01	14.49	54.0	-12.99	AV	233.70	100	Vertical	Pass
5	16441.140	54.75	19.68	74.0	-19.25	Peak	117.60	100	Vertical	Pass
5**	16441.140	44.99	19.68	54.0	-9.01	AV	117.60	100	Vertical	Pass
6	17788.303	56.12	21.15	74.0	-17.88	Peak	262.40	100	Vertical	Pass
6**	17788.303	46.53	21.15	54.0	-7.47	AV	262.40	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-09_18.14.58

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

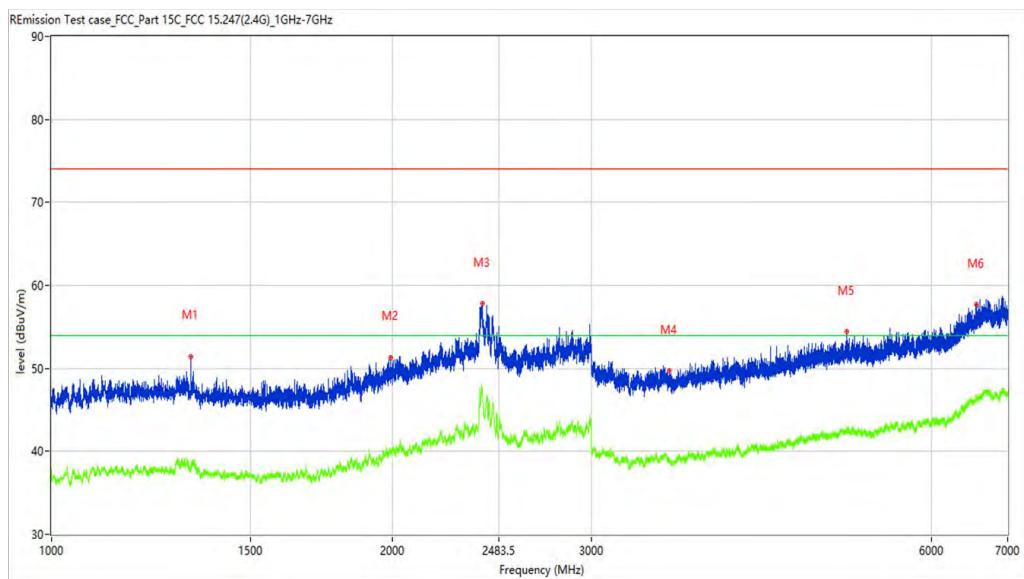


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.709	51.47	-4.96	74.0	-22.53	Peak	288.10	100	Horizontal	Pass
1**	1327.709	38.44	-4.96	54.0	-15.56	AV	288.10	100	Horizontal	Pass
2	1994.626	51.34	-2.65	74.0	-22.66	Peak	245.60	100	Horizontal	Pass
2**	1994.626	40.01	-2.65	54.0	-13.99	AV	245.60	100	Horizontal	Pass
3	2402.325	57.81	5.28	74.0	-16.19	Peak	354.20	100	Horizontal	Pass
3**	2402.325	47.43	5.28	54.0	-6.57	AV	354.20	100	Horizontal	Pass
4	3513.436	49.70	-1.20	74.0	-24.30	Peak	190.40	100	Horizontal	Pass
4**	3513.436	38.99	-1.20	54.0	-15.01	AV	190.40	100	Horizontal	Pass
5	5045.244	54.43	1.71	74.0	-19.57	Peak	360.00	100	Horizontal	Pass
5**	5045.244	42.34	1.71	54.0	-11.66	AV	360.00	100	Horizontal	Pass
6	6567.554	57.65	4.84	74.0	-16.35	Peak	71.30	100	Horizontal	Pass
6**	6567.554	46.87	4.84	54.0	-7.13	AV	71.30	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_18.25.51

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

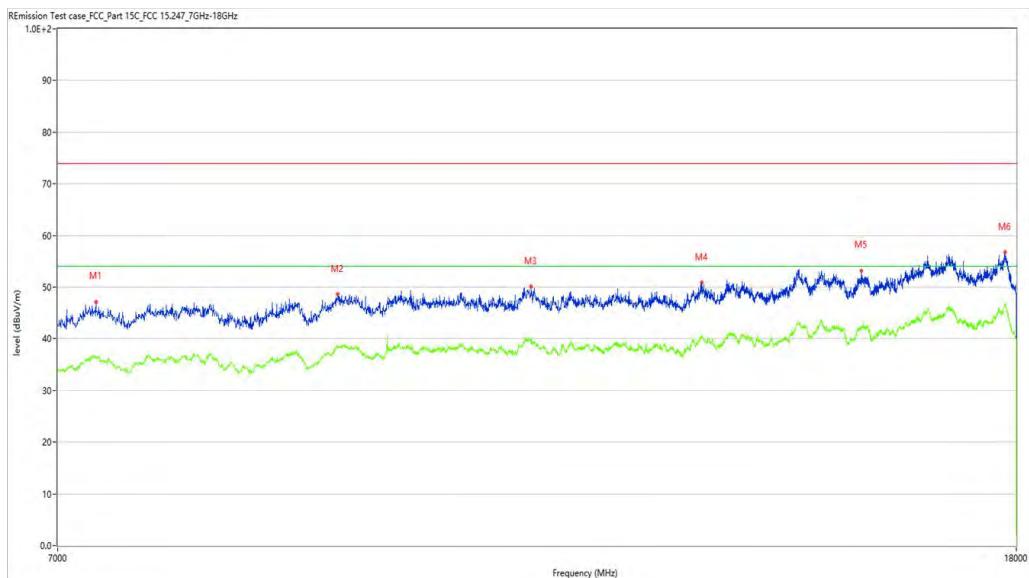


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7269.433	47.19	2.87	74.0	-26.81	Peak	195.40	100	Horizontal	Pass
1**	7269.433	36.46	2.87	54.0	-17.54	AV	195.40	100	Horizontal	Pass
2	9226.943	48.58	8.55	74.0	-25.42	Peak	65.50	100	Horizontal	Pass
2**	9226.943	38.44	8.55	54.0	-15.56	AV	65.50	100	Horizontal	Pass
3	11162.459	50.13	10.80	74.0	-23.87	Peak	29.10	100	Horizontal	Pass
3**	11162.459	39.93	10.80	54.0	-14.07	AV	29.10	100	Horizontal	Pass
4	13205.199	50.89	12.37	74.0	-23.11	Peak	167.50	100	Horizontal	Pass
4**	13205.199	40.39	12.37	54.0	-13.61	AV	167.50	100	Horizontal	Pass
5	15451.387	53.21	15.29	74.0	-20.79	Peak	154.10	100	Horizontal	Pass
5**	15451.387	42.37	15.29	54.0	-11.63	AV	154.10	100	Horizontal	Pass
6	17804.799	56.82	20.92	74.0	-17.18	Peak	250.80	100	Horizontal	Pass
6**	17804.799	46.28	20.92	54.0	-7.72	AV	250.80	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-09_17.43.20

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

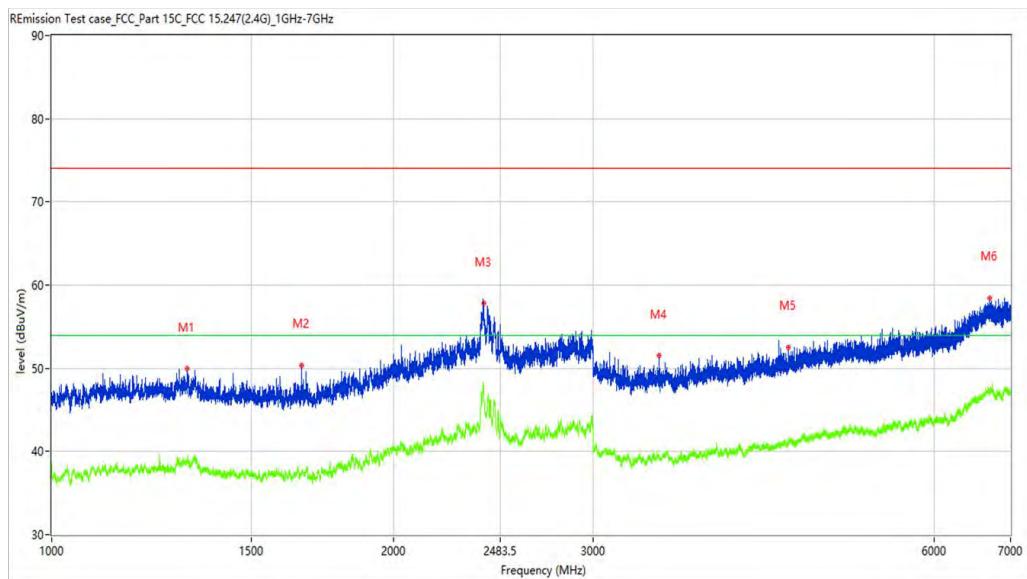


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1316.960	49.93	-4.54	74.0	-24.07	Peak	19.40	100	Vertical	Pass
1**	1316.960	38.94	-4.54	54.0	-15.06	AV	19.40	100	Vertical	Pass
2	1660.917	50.36	-5.00	74.0	-23.64	Peak	300.70	100	Vertical	Pass
2**	1660.917	37.64	-5.00	54.0	-16.36	AV	300.70	100	Vertical	Pass
3	2402.575	57.84	5.27	74.0	-16.16	Peak	249.00	100	Vertical	Pass
3**	2402.575	47.36	5.27	54.0	-6.64	AV	249.00	100	Vertical	Pass
4	3432.946	51.48	-1.37	74.0	-22.52	Peak	359.60	100	Vertical	Pass
4**	3432.946	39.10	-1.37	54.0	-14.90	AV	359.60	100	Vertical	Pass
5	4462.817	52.53	0.61	74.0	-21.47	Peak	360.10	100	Vertical	Pass
5**	4462.817	41.24	0.61	54.0	-12.76	AV	360.10	100	Vertical	Pass
6	6706.037	58.48	5.93	74.0	-15.52	Peak	24.80	100	Vertical	Pass
6**	6706.037	47.03	5.93	54.0	-6.97	AV	24.80	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_17.15.44

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

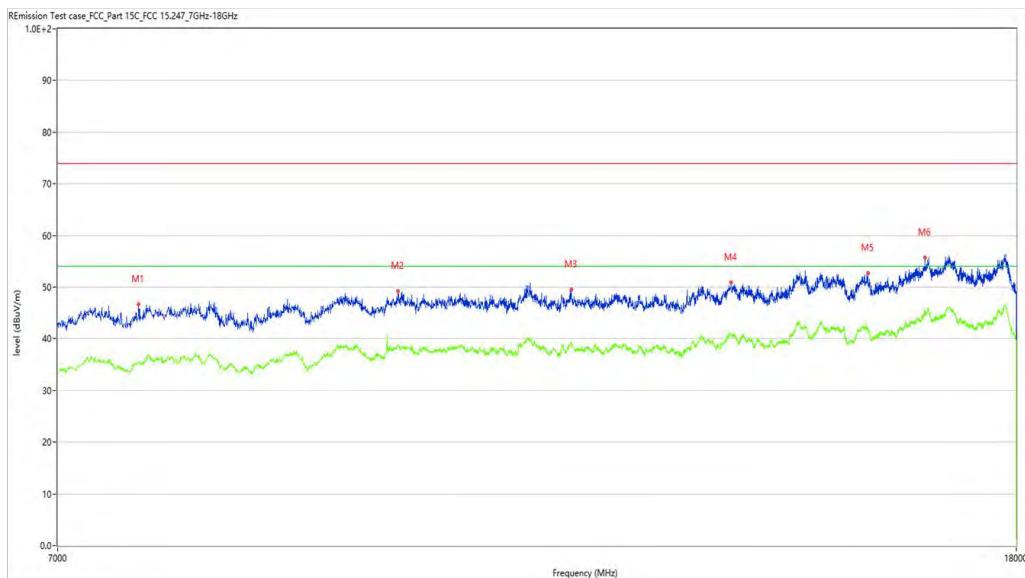


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7580.105	46.69	3.42	74.0	-27.31	Peak	181.60	100	Vertical	Pass
1**	7580.105	35.14	3.42	54.0	-18.86	AV	181.60	100	Vertical	Pass
2	9790.552	49.25	9.64	74.0	-24.75	Peak	260.10	100	Vertical	Pass
2**	9790.552	38.76	9.64	54.0	-15.24	AV	260.10	100	Vertical	Pass
3	11610.597	49.51	11.42	74.0	-24.49	Peak	360.00	100	Vertical	Pass
3**	11610.597	39.27	11.42	54.0	-14.73	AV	360.00	100	Vertical	Pass
4	13587.353	50.90	14.51	74.0	-23.10	Peak	353.10	100	Vertical	Pass
4**	13587.353	40.89	14.51	54.0	-13.11	AV	353.10	100	Vertical	Pass
5	15553.112	52.65	15.53	74.0	-21.35	Peak	273.50	100	Vertical	Pass
5**	15553.112	41.81	15.53	54.0	-12.19	AV	273.50	100	Vertical	Pass
6	16452.137	55.71	19.84	74.0	-18.29	Peak	297.70	100	Vertical	Pass
6**	16452.137	44.75	19.84	54.0	-9.25	AV	297.70	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-09_18.11.22

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

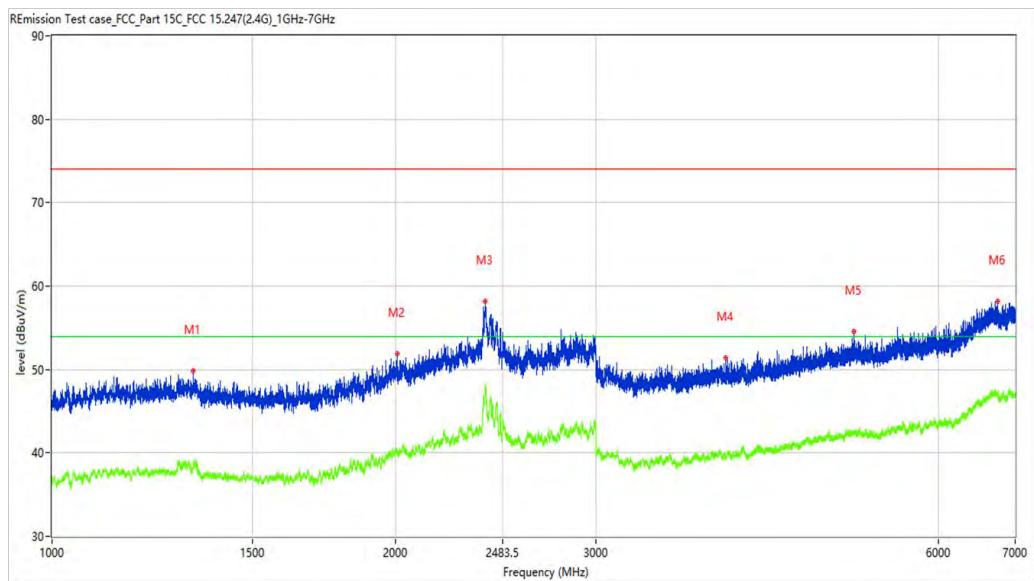


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.959	49.83	-4.64	74.0	-24.17	Peak	245.60	100	Horizontal	Pass
1**	1330.959	39.11	-4.64	54.0	-14.89	AV	245.60	100	Horizontal	Pass
2	2008.624	51.86	-2.17	74.0	-22.14	Peak	311.90	100	Horizontal	Pass
2**	2008.624	40.22	-2.17	54.0	-13.78	AV	311.90	100	Horizontal	Pass
3	2399.825	58.13	5.38	74.0	-15.87	Peak	161.20	100	Horizontal	Pass
3**	2399.825	48.01	5.38	54.0	-5.99	AV	161.20	100	Horizontal	Pass
4	3898.888	51.38	-0.34	74.0	-22.62	Peak	77.30	100	Horizontal	Pass
4**	3898.888	39.75	-0.34	54.0	-14.25	AV	77.30	100	Horizontal	Pass
5	5053.743	54.53	1.71	74.0	-19.47	Peak	301.30	100	Horizontal	Pass
5**	5053.743	42.36	1.71	54.0	-11.64	AV	301.30	100	Horizontal	Pass
6	6759.530	58.18	5.62	74.0	-15.82	Peak	187.80	100	Horizontal	Pass
6**	6759.530	46.80	5.62	54.0	-7.20	AV	187.80	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_18.42.34

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

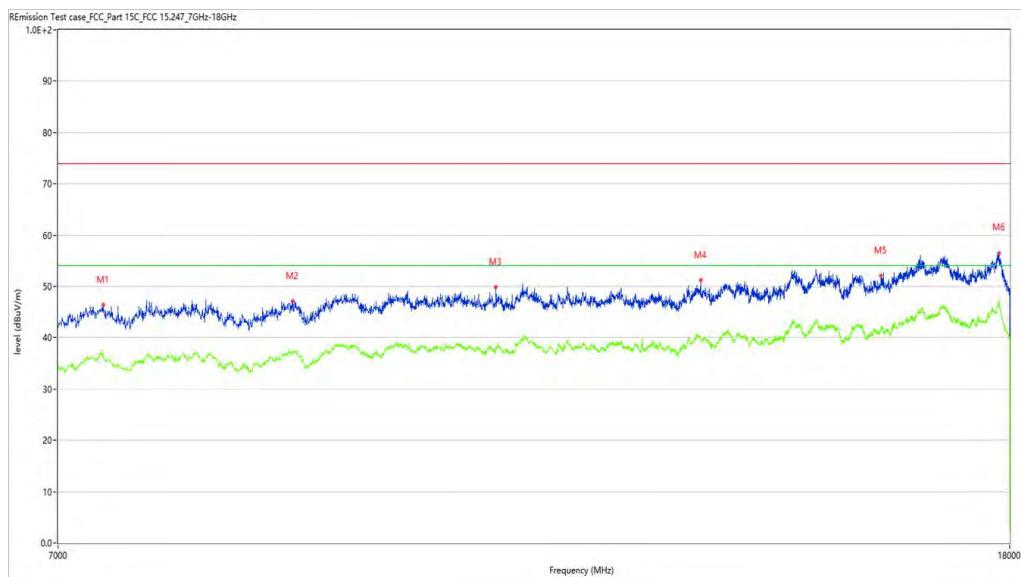

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7321.670	46.32	3.06	74.0	-27.68	Peak	124.30	100	Horizontal	Pass
1**	7321.670	36.37	3.06	54.0	-17.63	AV	124.30	100	Horizontal	Pass
2	8836.541	47.08	7.35	74.0	-26.92	Peak	188.30	100	Horizontal	Pass
2**	8836.541	37.01	7.35	54.0	-16.99	AV	188.30	100	Horizontal	Pass
3	10810.547	49.78	10.47	74.0	-24.22	Peak	70.00	100	Horizontal	Pass
3**	10810.547	37.83	10.47	54.0	-16.17	AV	70.00	100	Horizontal	Pass
4	13243.689	51.21	12.33	74.0	-22.79	Peak	325.60	100	Horizontal	Pass
4**	13243.689	39.75	12.33	54.0	-14.25	AV	325.60	100	Horizontal	Pass
5	15839.040	52.06	15.90	74.0	-21.94	Peak	156.70	100	Horizontal	Pass
5**	15839.040	41.76	15.90	54.0	-12.24	AV	156.70	100	Horizontal	Pass
6	17807.548	56.52	20.81	74.0	-17.48	Peak	147.80	100	Horizontal	Pass
6**	17807.548	46.62	20.81	54.0	-7.38	AV	147.80	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-09_17.48.06

EUT Name:

N.A

Test Engineer:

LYT

Manufacture:

N.A

Test Standard:

FCC

Model Name:

N.A

Work Additon:

Normal

Templ.(oC):

20.9

Load:


Full load

Hum:

50

Remark:

DR-RSE01-E19110011-05#04

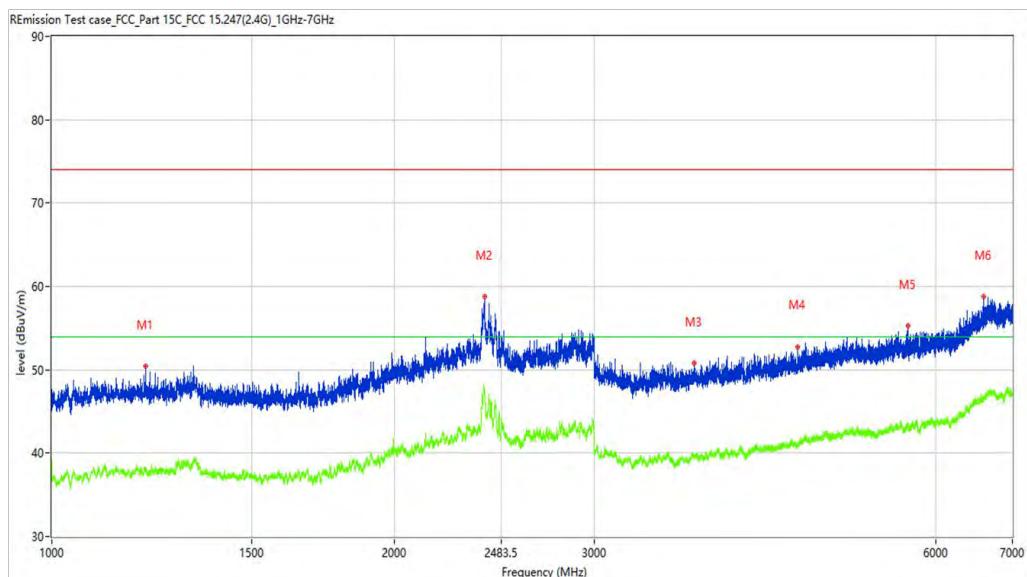

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1210.224	50.41	-4.16	74.0	-23.59	Peak	326.30	100	Vertical	Pass
1**	1210.224	38.19	-4.16	54.0	-15.81	AV	326.30	100	Vertical	Pass
2	2401.575	58.79	5.31	74.0	-15.21	Peak	151.50	100	Vertical	Pass
2**	2401.575	47.54	5.31	54.0	-6.46	AV	151.50	100	Vertical	Pass
3	3672.916	50.78	-0.79	74.0	-23.22	Peak	0.40	100	Vertical	Pass
3**	3672.916	39.53	-0.79	54.0	-14.47	AV	0.40	100	Vertical	Pass
4	4532.308	52.79	0.79	74.0	-21.21	Peak	34.40	100	Vertical	Pass
4**	4532.308	40.77	0.79	54.0	-13.23	AV	34.40	100	Vertical	Pass
5	5670.666	55.25	2.13	74.0	-18.75	Peak	170.90	100	Vertical	Pass
5**	5670.666	43.55	2.13	54.0	-10.45	AV	170.90	100	Vertical	Pass
6	6602.550	58.77	4.86	74.0	-15.23	Peak	38.50	100	Vertical	Pass
6**	6602.550	46.38	4.86	54.0	-7.62	AV	38.50	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_17.53.20

EUT Name: N.A

Test Engineer: LYT

Manufacture: N.A

Test Standard: FCC

Model Name: N.A


Work Additon: Normal

Templ.(oC): 20.9

Load: Full load

Hum: 50

Remark: DR-RSE01-E19110011-05#04

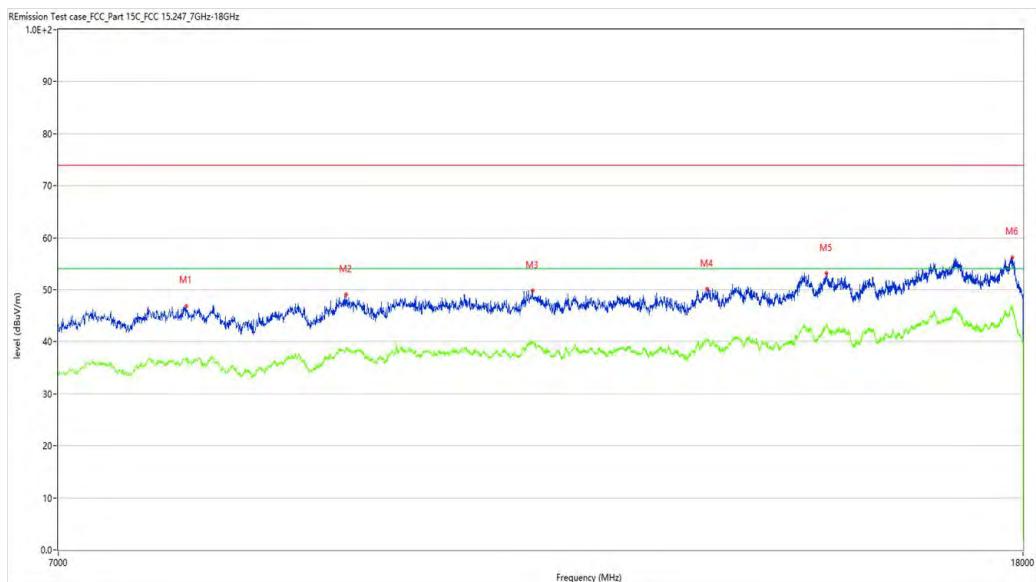


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7934.766	46.89	4.77	74.0	-27.11	Peak	16.80	100	Vertical	Pass
1**	7934.766	36.21	4.77	54.0	-17.79	AV	16.80	100	Vertical	Pass
2	9276.431	49.13	8.87	74.0	-24.87	Peak	326.80	100	Vertical	Pass
2**	9276.431	38.48	8.87	54.0	-15.52	AV	326.80	100	Vertical	Pass
3	11134.966	49.85	10.76	74.0	-24.15	Peak	160.10	100	Vertical	Pass
3**	11134.966	40.13	10.76	54.0	-13.87	AV	160.10	100	Vertical	Pass
4	13213.447	50.17	12.36	74.0	-23.83	Peak	210.00	100	Vertical	Pass
4**	13213.447	40.19	12.36	54.0	-13.81	AV	210.00	100	Vertical	Pass
5	14852.037	53.19	18.20	74.0	-20.81	Peak	58.10	100	Vertical	Pass
5**	14852.037	43.11	18.20	54.0	-10.89	AV	58.10	100	Vertical	Pass
6	17810.297	56.23	20.71	74.0	-17.77	Peak	256.90	100	Vertical	Pass
6**	17810.297	46.52	20.71	54.0	-7.48	AV	256.90	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-09_18.06.13

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

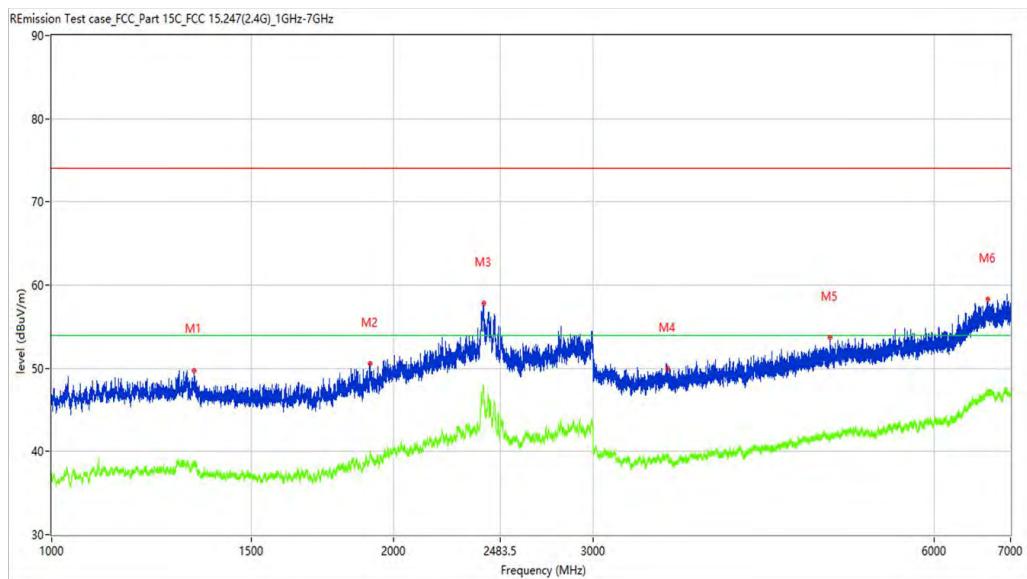


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.958	49.75	-4.35	74.0	-24.25	Peak	358.70	100	Horizontal	Pass
1**	1333.958	38.48	-4.35	54.0	-15.52	AV	358.70	100	Horizontal	Pass
2	1907.637	50.57	-2.90	74.0	-23.43	Peak	344.60	100	Horizontal	Pass
2**	1907.637	40.05	-2.90	54.0	-13.95	AV	344.60	100	Horizontal	Pass
3	2402.325	57.77	5.28	74.0	-16.23	Peak	142.20	100	Horizontal	Pass
3**	2402.325	47.47	5.28	54.0	-6.53	AV	142.20	100	Horizontal	Pass
4	3494.438	49.91	-1.25	74.0	-24.09	Peak	141.60	100	Horizontal	Pass
4**	3494.438	38.83	-1.25	54.0	-15.17	AV	141.60	100	Horizontal	Pass
5	4850.769	53.66	1.16	74.0	-20.34	Peak	10.30	100	Horizontal	Pass
5**	4850.769	42.02	1.16	54.0	-11.98	AV	10.30	100	Horizontal	Pass
6	6685.539	58.30	5.81	74.0	-15.70	Peak	46.30	100	Horizontal	Pass
6**	6685.539	47.34	5.81	54.0	-6.66	AV	46.30	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_18.46.22

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp (oC):	20.9	Load:	Full load
Hum.:	50	Remark:	DR-RSE01-E19110011-05#04

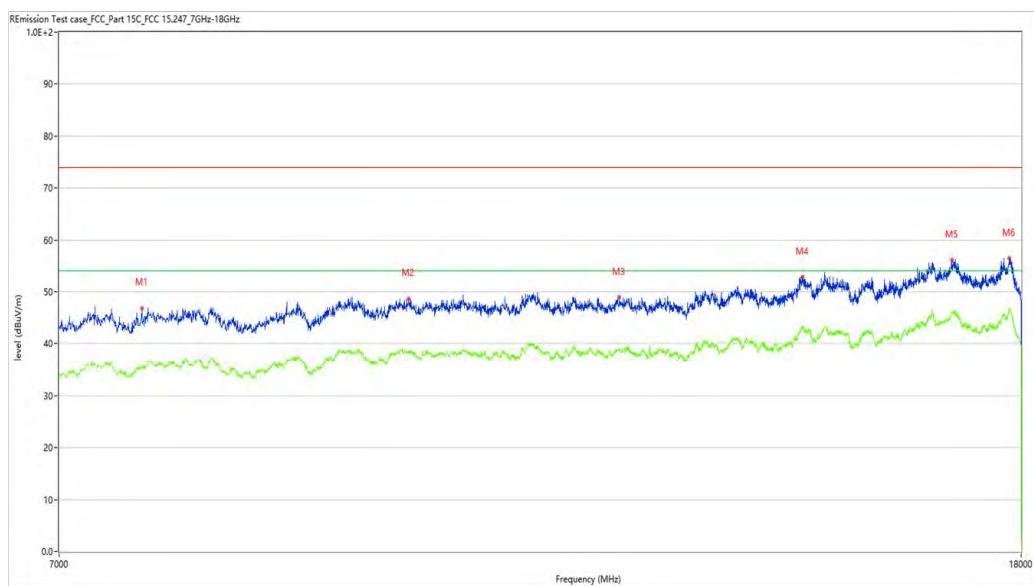


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7593.852	46.90	3.61	74.0	-27.10	Peak	15.40	100	Horizontal	Pass
1**	7593.852	35.76	3.61	54.0	-18.24	AV	15.40	100	Horizontal	Pass
2	9867.533	48.71	9.62	74.0	-25.29	Peak	166.30	100	Horizontal	Pass
2**	9867.533	38.19	9.62	54.0	-15.81	AV	166.30	100	Horizontal	Pass
3	12130.217	48.95	10.85	74.0	-25.05	Peak	28.80	100	Horizontal	Pass
3**	12130.217	38.59	10.85	54.0	-15.41	AV	28.80	100	Horizontal	Pass
4	14524.869	52.90	17.01	74.0	-21.10	Peak	110.40	100	Horizontal	Pass
4**	14524.869	43.31	17.01	54.0	-10.69	AV	110.40	100	Horizontal	Pass
5	16820.545	56.14	20.15	74.0	-17.86	Peak	345.40	100	Horizontal	Pass
5**	16820.545	46.08	20.15	54.0	-7.92	AV	345.40	100	Horizontal	Pass
6	17791.052	56.44	21.14	74.0	-17.56	Peak	358.30	100	Horizontal	Pass
6**	17791.052	46.39	21.14	54.0	-7.61	AV	358.30	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-01-09_17.58.37

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

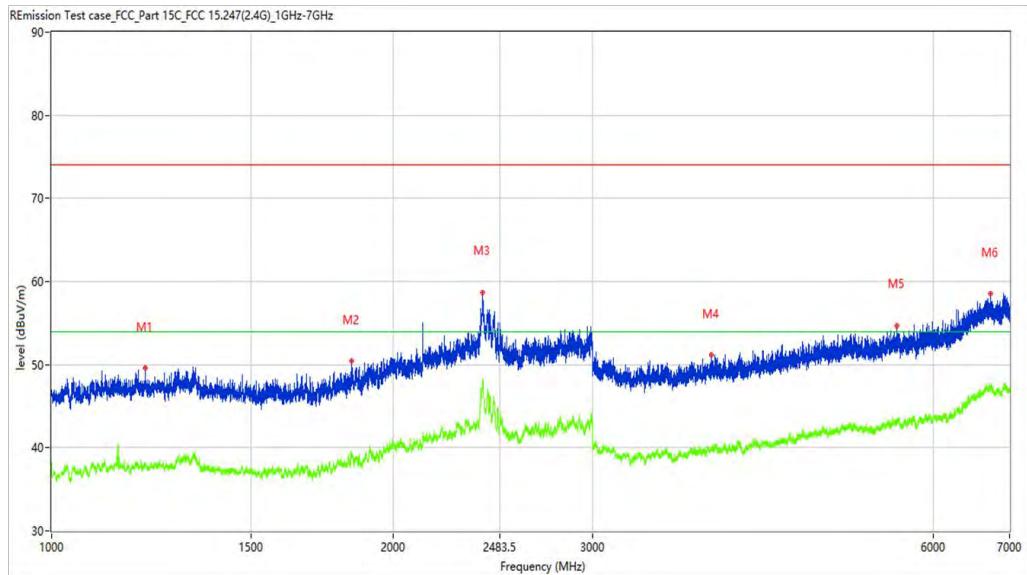


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1208.974	49.61	-4.00	74.0	-24.39	Peak	95.30	100	Vertical	Pass
1**	1208.974	37.85	-4.00	54.0	-16.15	AV	95.30	100	Vertical	Pass
2	1839.645	50.48	-3.60	74.0	-23.52	Peak	52.50	100	Vertical	Pass
2**	1839.645	39.18	-3.60	54.0	-14.82	AV	52.50	100	Vertical	Pass
3	2400.575	58.64	5.35	74.0	-15.36	Peak	282.80	100	Vertical	Pass
3**	2400.575	48.28	5.35	54.0	-5.72	AV	282.80	100	Vertical	Pass
4	3821.397	51.19	-0.65	74.0	-22.81	Peak	360.00	100	Vertical	Pass
4**	3821.397	39.72	-0.65	54.0	-14.28	AV	360.00	100	Vertical	Pass
5	5571.679	54.64	1.98	74.0	-19.36	Peak	202.70	100	Vertical	Pass
5**	5571.679	42.90	1.98	54.0	-11.10	AV	202.70	100	Vertical	Pass
6	6732.033	58.51	5.78	74.0	-15.49	Peak	170.70	100	Vertical	Pass
6**	6732.033	47.33	5.78	54.0	-6.67	AV	170.70	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-01-07_17.57.39

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

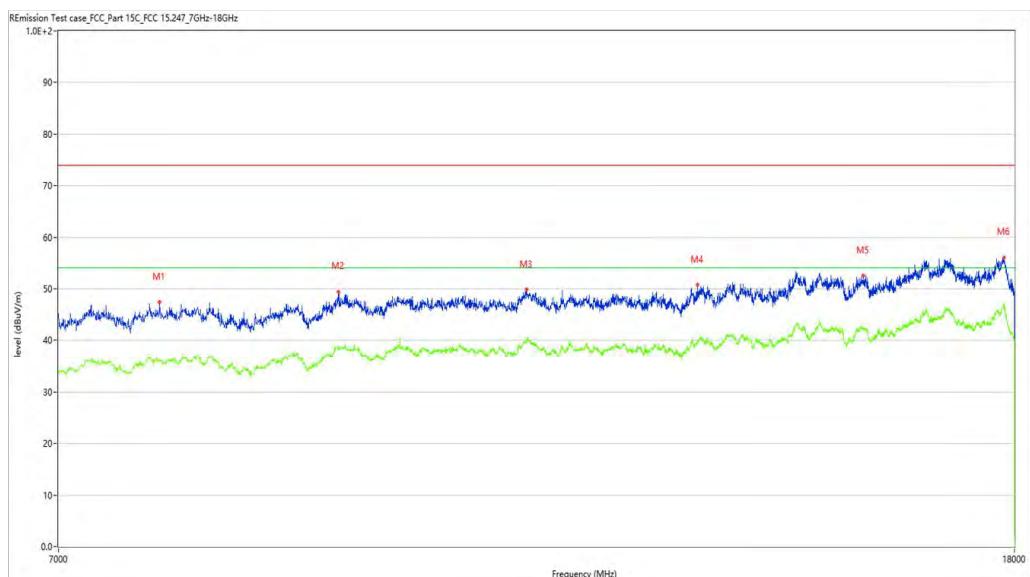

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7736.816	47.48	4.75	74.0	-26.52	Peak	1.00	100	Vertical	Pass
1**	7736.816	36.05	4.75	54.0	-17.95	AV	1.00	100	Vertical	Pass
2	9232.442	49.46	8.56	74.0	-24.54	Peak	98.60	100	Vertical	Pass
2**	9232.442	38.44	8.56	54.0	-15.56	AV	98.60	100	Vertical	Pass
3	11112.972	49.84	10.65	74.0	-24.16	Peak	70.70	100	Vertical	Pass
3**	11112.972	39.96	10.65	54.0	-14.04	AV	70.70	100	Vertical	Pass
4	13158.460	50.71	12.15	74.0	-23.29	Peak	318.20	100	Vertical	Pass
4**	13158.460	39.46	12.15	54.0	-14.54	AV	318.20	100	Vertical	Pass
5	15503.624	52.57	15.33	74.0	-21.43	Peak	313.70	100	Vertical	Pass
5**	15503.624	42.23	15.33	54.0	-11.77	AV	313.70	100	Vertical	Pass
6	17815.796	56.09	20.50	74.0	-17.91	Peak	153.70	100	Vertical	Pass

WIFI2.4G-Bandedge -B-Low channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2020-01-08_17.52.42

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 20.9

Load: Full load

Hum.: 50

Remark: DR-RSE01-E19110011-05#04

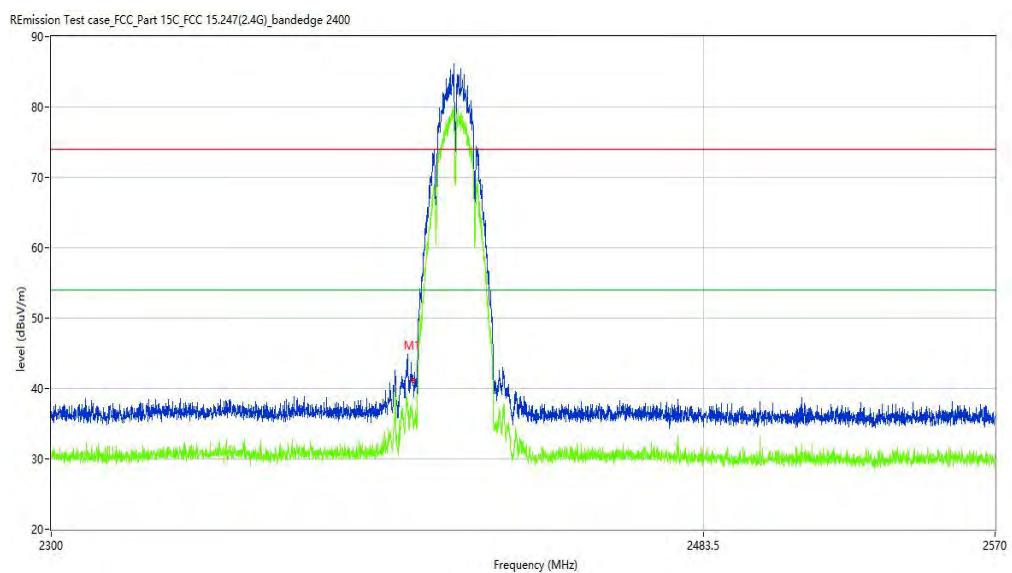

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2400.000	41.10	-4.18	74.0	-32.90	Peak	83.30	100	H	Pass
1**	2400.000	36.43	-4.18	54.0	-17.57	AV	83.30	100	H	Pass


WIFI2.4G-Bandedge -B-Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2020-01-09_15.52.22

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

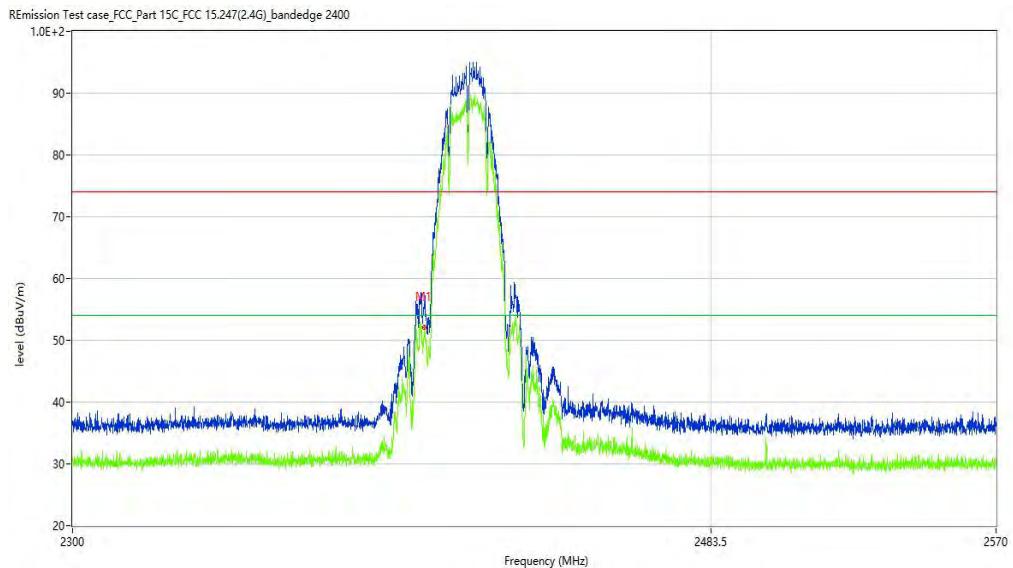


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2400.000	52.36	-4.18	74.0	-21.64	Peak	214.73	100	V	Pass
1**	2400.000	48.12	-4.18	54.0	-5.88	AV	214.73	100	V	Pass

Test result

Project Number: Certification

Test Time: 2020-01-09_16.23.17

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

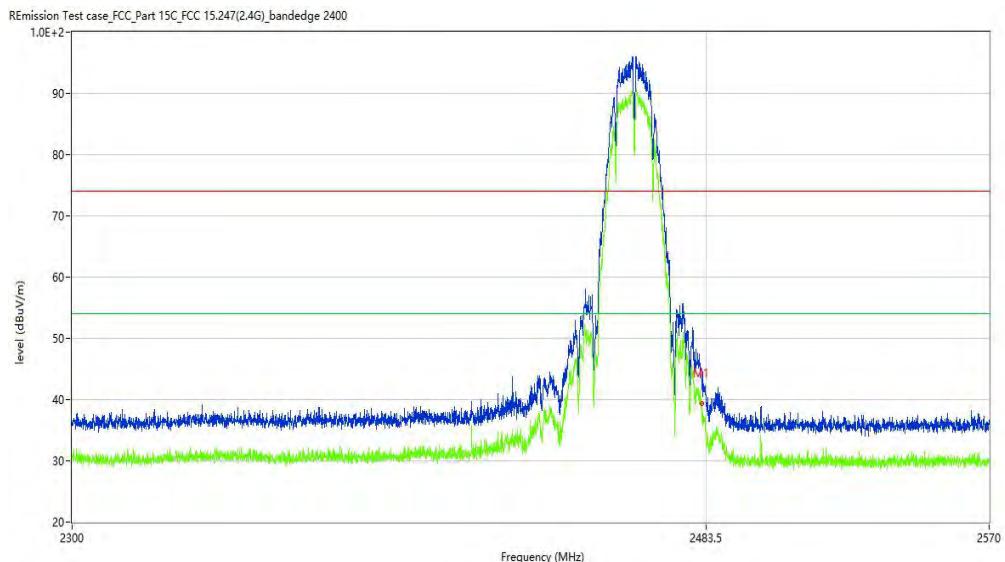

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	39.29	-3.87	74.0	-34.71	Peak	359.00	100	H	Pass
1**	2483.500	33.72	-3.87	54.0	-20.28	AV	359.00	100	H	Pass


WIFI2.4G-Bandedge -B-High 11 channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2020-01-09_16.19.30

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

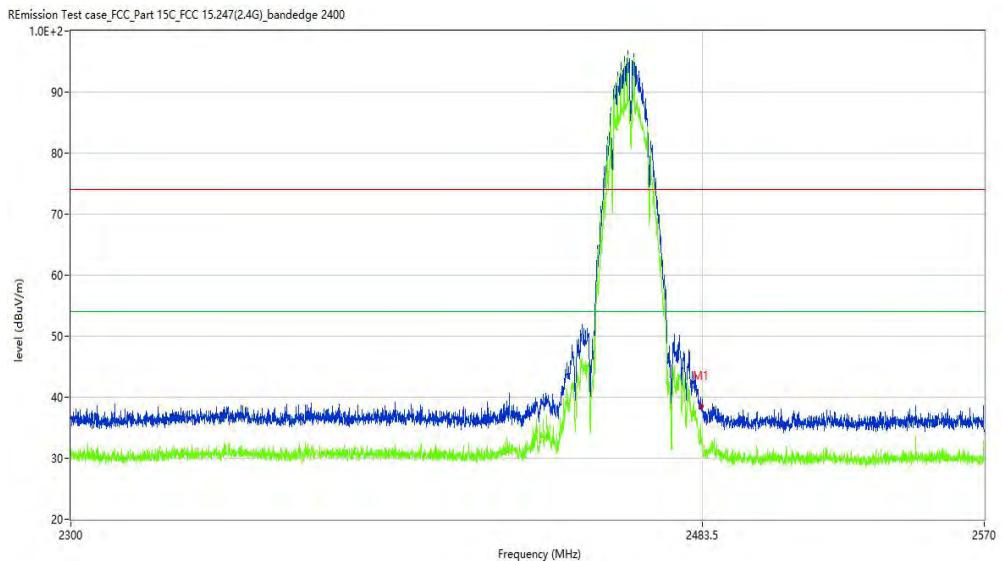

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	38.63	-3.87	74.0	-35.37	Peak	296.90	100	V	Pass
1**	2483.500	32.10	-3.87	54.0	-21.90	AV	296.90	100	V	Pass


WIFI2.4G-Bandedge -B-High 13 channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2020-01-21_15.36.13

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.1	Load:	full load
Hum.:	54	Remark:	DR-RSE01-E19110011-05#04

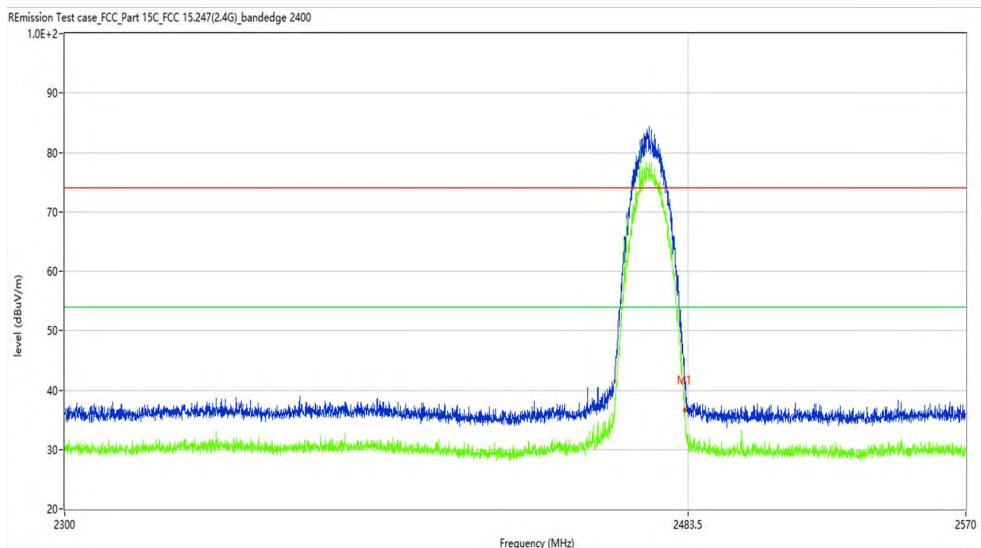

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	37.00	-3.87	74.0	-37.00	Peak	201.00	100	H	Pass
1**	2483.500	31.73	-3.87	54.0	-22.27	AV	201.00	100	H	Pass


WIFI2.4G-Bandedge -B-High 13 channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2020-01-21_15.07.06

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.1	Load:	full load
Hum.:	54	Remark:	DR-RSE01-E19110011-05#04

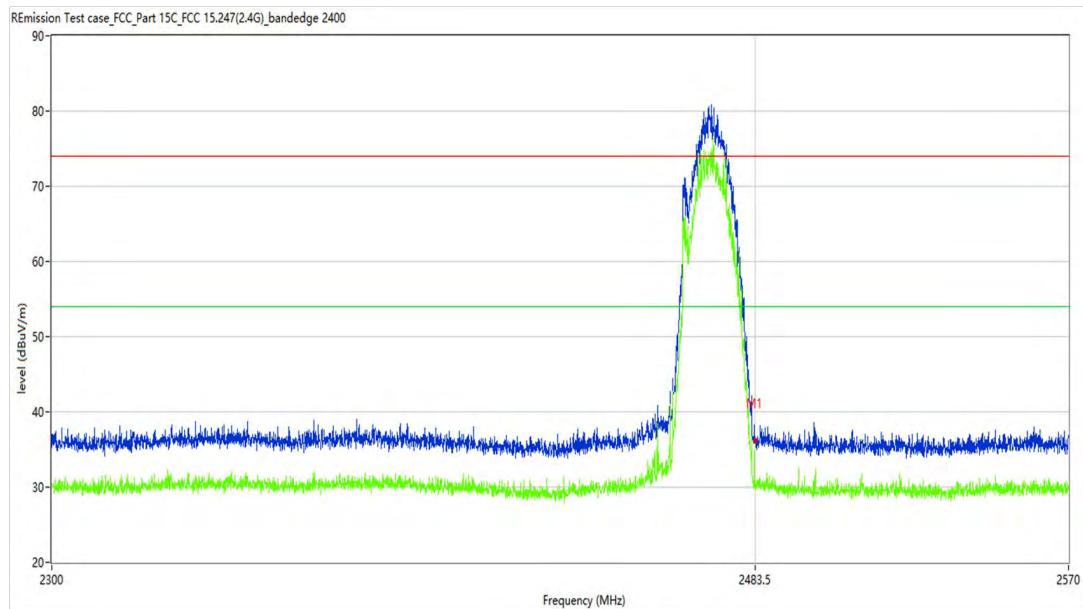

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	36.21	-3.87	74.0	-37.79	Peak	83.91	100	V	Pass
1**	2483.500	30.73	-3.87	54.0	-23.27	AV	83.91	100	V	Pass

WIFI2.4G-Bandedge -G-Low channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2020-01-09_16.56.00

EUT Name: N.A

Test Engineer: LYT

Manufacture: N.A

Test Standard: FCC

Model Name: N.A


Work Additon: Normal

Templ.(oC): 20.9

Load: Full load

Hum: 50

Remark: DR-RSE01-E19110011-05#04

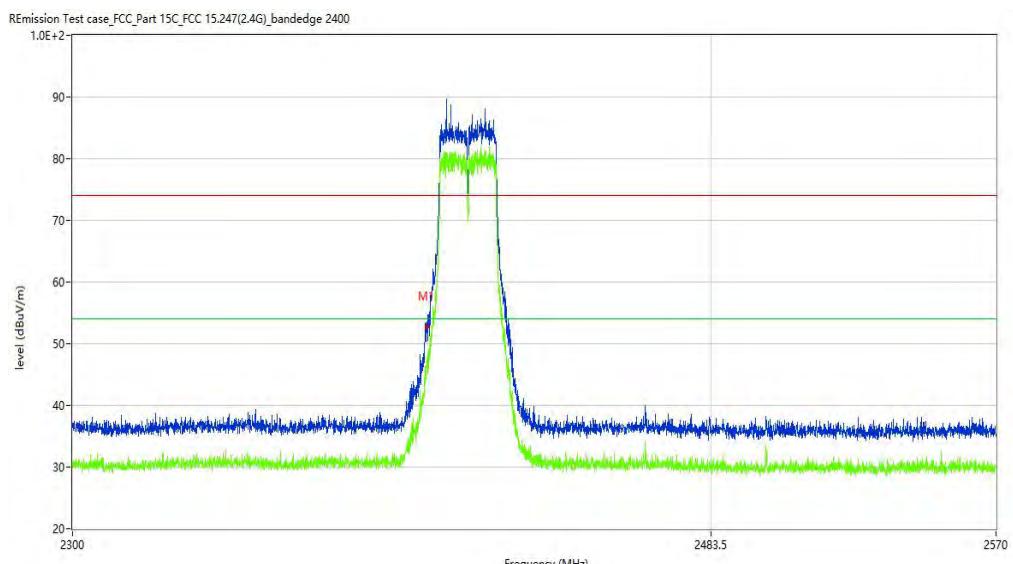

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2400.000	52.52	-4.18	74.0	-21.48	Peak	214.87	100	H	Pass
1**	2400.000	46.77	-4.18	54.0	-7.23	AV	214.87	100	H	Pass


WIFI2.4G-Bandedge -G-Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2020-01-09_16.46.46

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

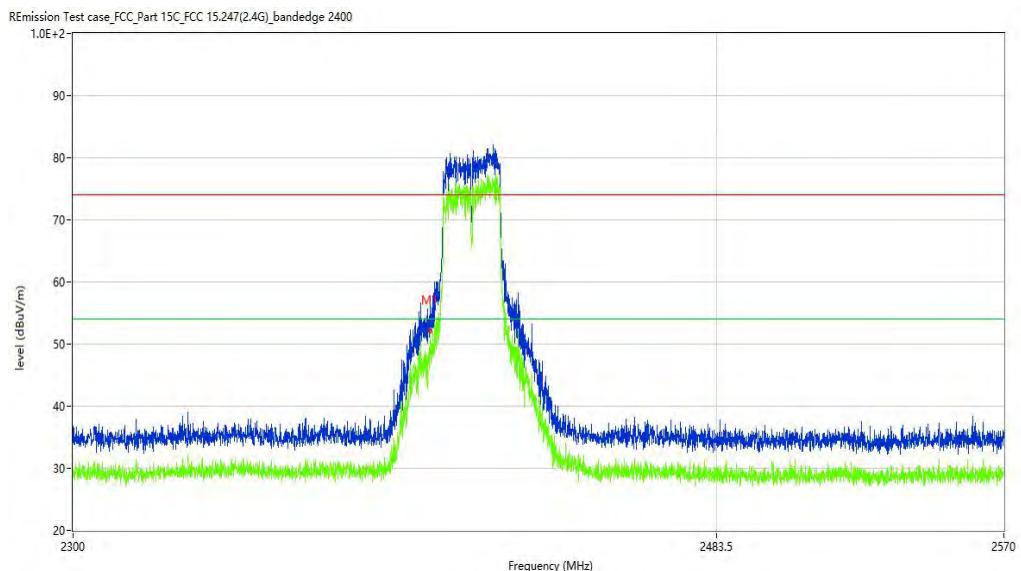

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2400.000	52.78	-4.18	74.0	-21.22	Peak	17.40	100	V	Pass
1**	2400.000	48.75	-4.18	54.0	-5.25	AV	17.40	100	V	Pass


WIFI2.4G-Bandedge -G-High 11 channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2020-01-09_16.26.39

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

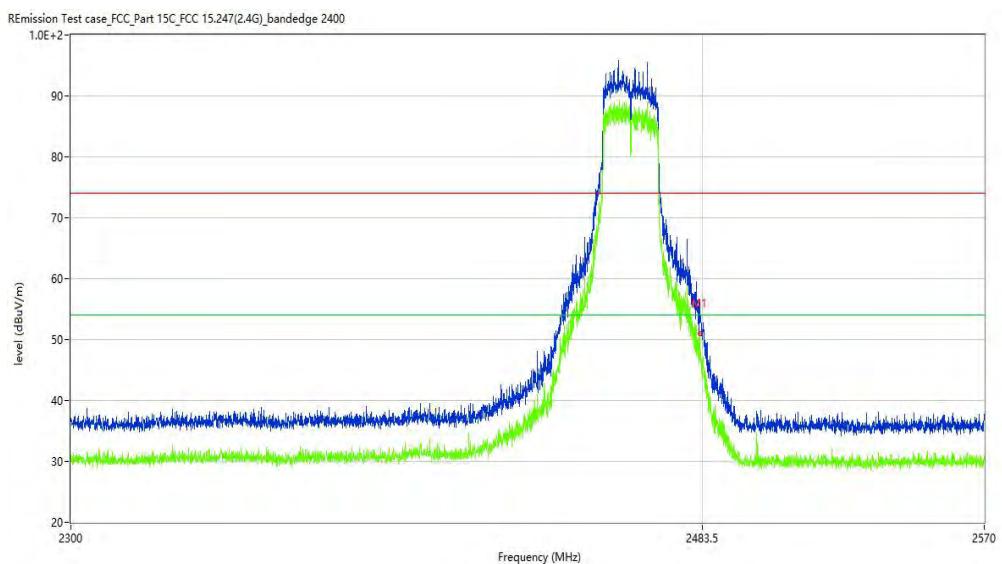

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.42	-3.87	74.0	-22.58	Peak	166.47	100	H	Pass
1**	2483.500	46.19	-3.87	54.0	-7.81	AV	166.47	100	H	Pass


WIFI2.4G-Bandedge -G-High 11 channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2020-01-09_16.35.59

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

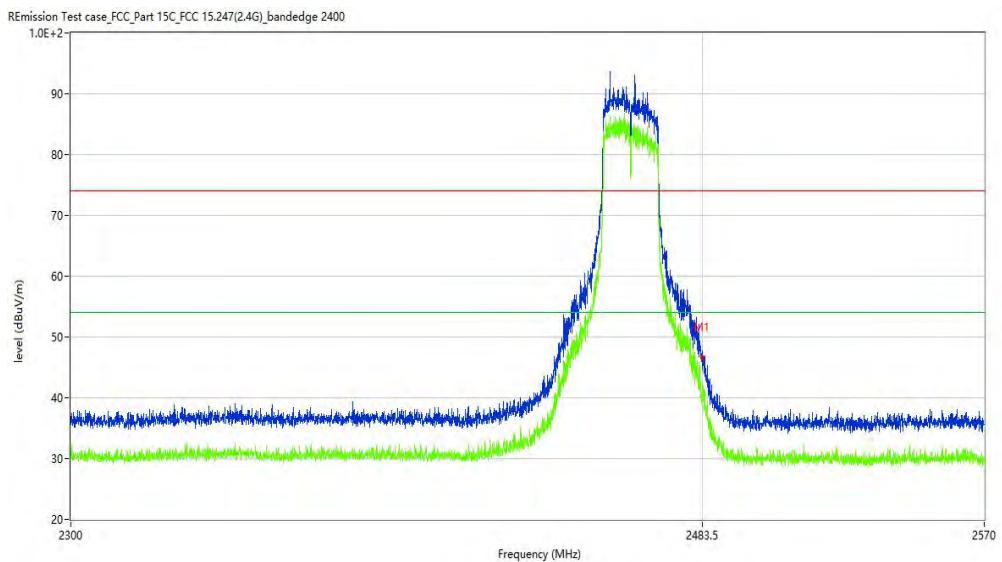

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	46.54	-3.87	74.0	-27.46	Peak	312.60	100	V	Pass
1**	2483.500	40.91	-3.87	54.0	-13.09	AV	312.60	100	V	Pass

WIFI2.4G-Bandedge -G-High 13 channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2020-01-21_15.39.40

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19110011-05#04

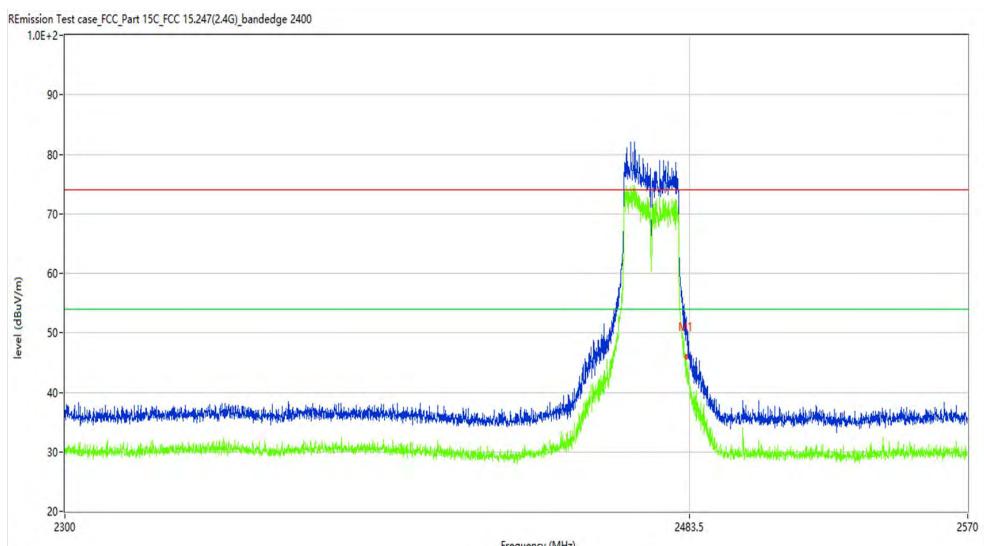

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	45.87	-3.87	74.0	-28.13	Peak	206.44	100	H	Pass
1**	2483.500	40.61	-3.87	54.0	-13.39	AV	206.44	100	H	Pass


WIFI2.4G-Bandedge -G-High 13 channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2020-01-21_15.42.08

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.1	Load:	full load
Hum.:	54	Remark:	DR-RSE01-E19110011-05#04

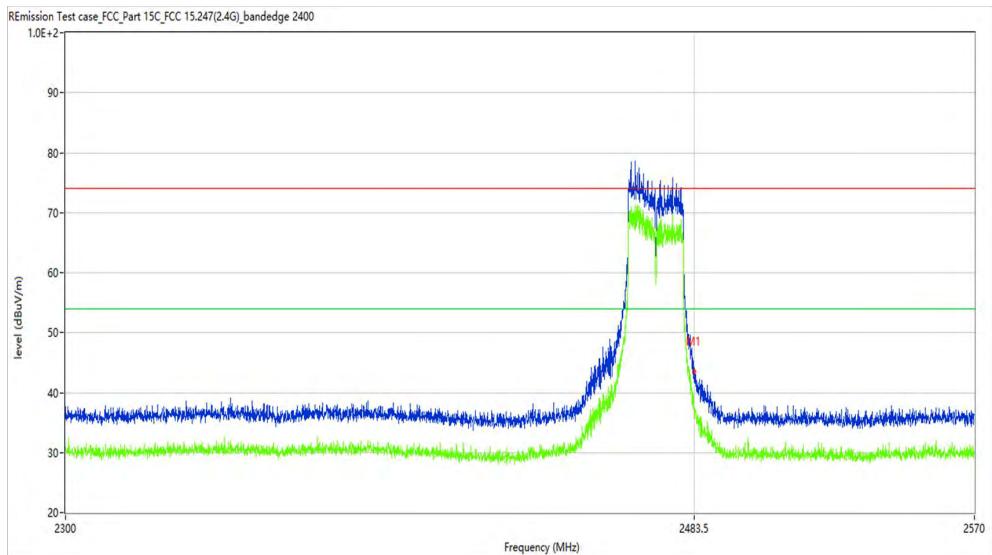

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	43.59	-3.87	74.0	-30.41	Peak	268.00	100	V	Pass
1**	2483.500	37.18	-3.87	54.0	-16.82	AV	268.00	100	V	Pass


WIFI2.4G-Bandedge -N-Low channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2020-01-09_16.58.58

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

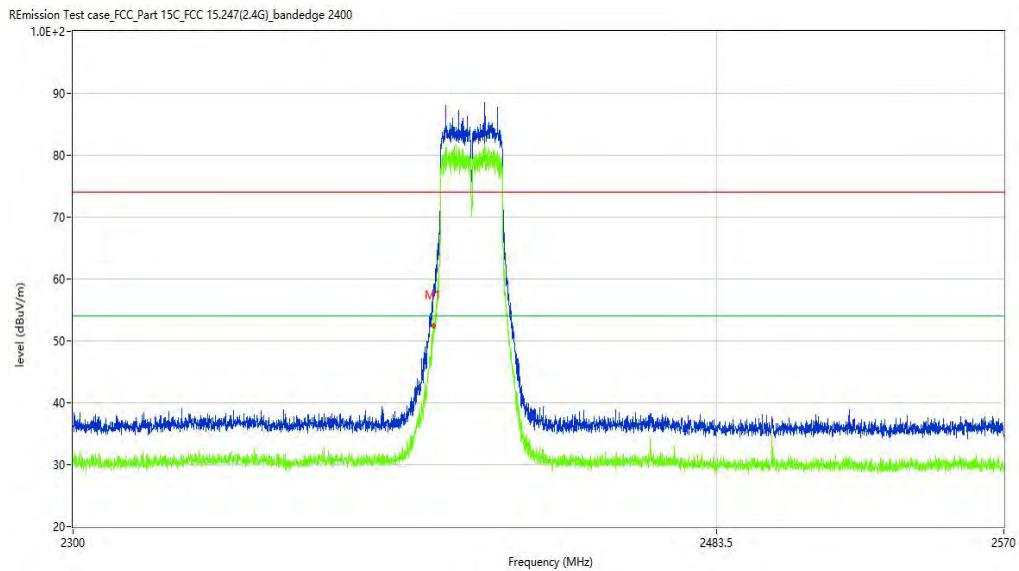

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2400.000	52.43	-4.18	74.0	-21.57	Peak	203.38	100	H	Pass
1**	2400.000	46.86	-4.18	54.0	-7.14	AV	203.38	100	H	Pass


WIFI2.4G-Bandedge -N-Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2020-01-09_16.40.32

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

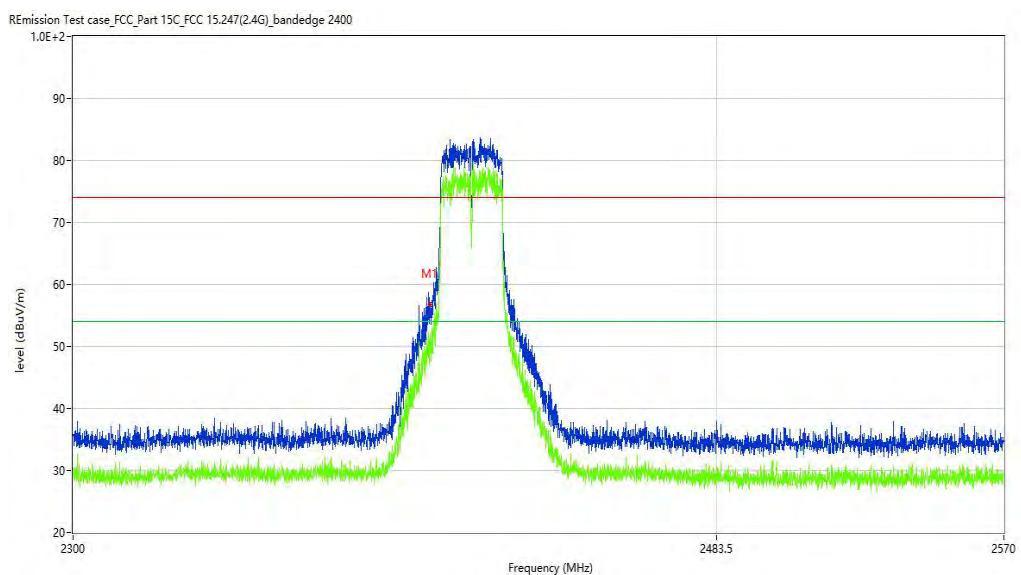

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2400.000	56.40	-4.18	74.0	-17.60	Peak	347.80	100	V	Pass
1**	2400.000	51.14	-4.18	54.0	-2.86	AV	347.80	100	V	Pass

WIFI2.4G-Bandedge -N-High 11 channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2020-01-09_16.30.01

EUT Name: N.A

Test Engineer: LYT

Manufacture: N.A

Test Standard: FCC

Model Name: N.A


Work Additon: Normal

Templ.(oC): 20.9

Load: Full load

Hum: 50

Remark: DR-RSE01-E19110011-05#04

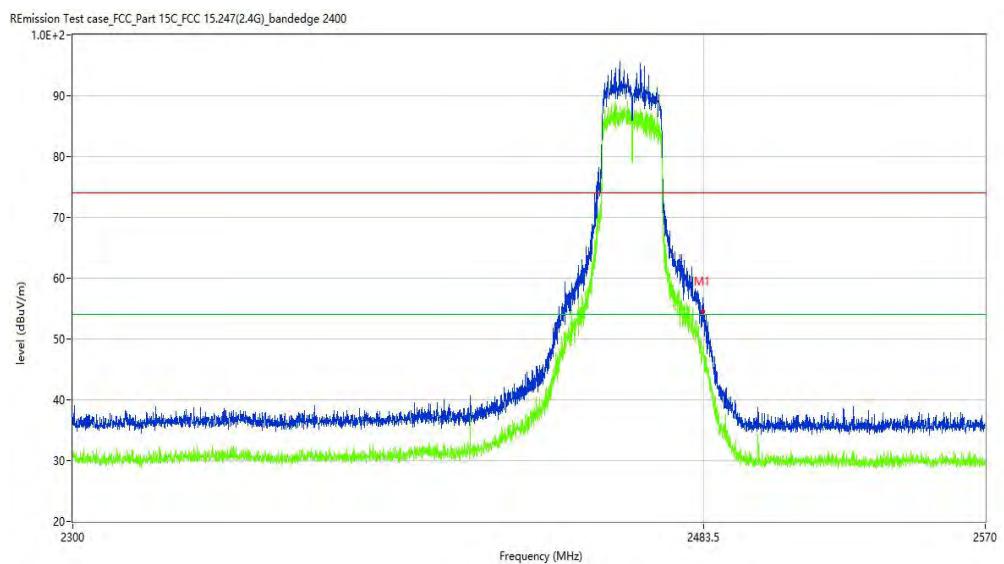

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.32	-3.87	74.0	-19.68	Peak	222.35	100	H	Pass
1**	2483.500	48.49	-3.87	54.0	-5.51	AV	222.35	100	H	Pass

WIFI2.4G-Bandedge -N-High 11 channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2020-01-09_16.32.46

EUT Name: N.A

Test Engineer: LYT

Manufacture: N.A

Test Standard: FCC

Model Name: N.A


Work Additon: Normal

Templ.(oC): 20.9

Load: Full load

Hum: 50

Remark: DR-RSE01-E19110011-05#04

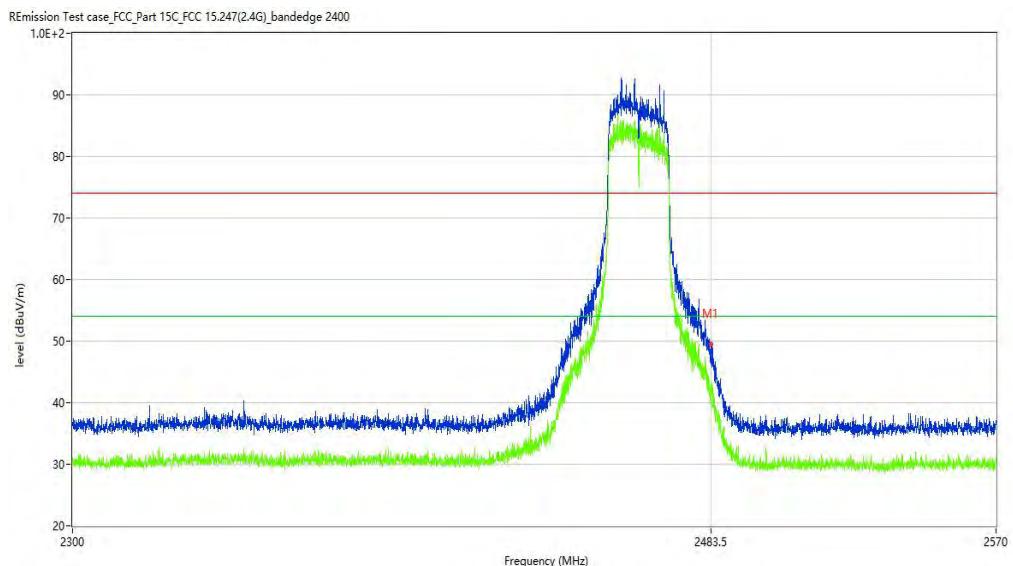

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	49.30	-3.87	74.0	-24.70	Peak	304.57	100	V	Pass
1**	2483.500	42.74	-3.87	54.0	-11.26	AV	304.57	100	V	Pass


WIFI2.4G-Bandedge -N-High 13 channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2020-01-21_16.21.08

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.1	Load:	full load
Hum.:	54	Remark:	DR-RSE01-E19110011-05#04

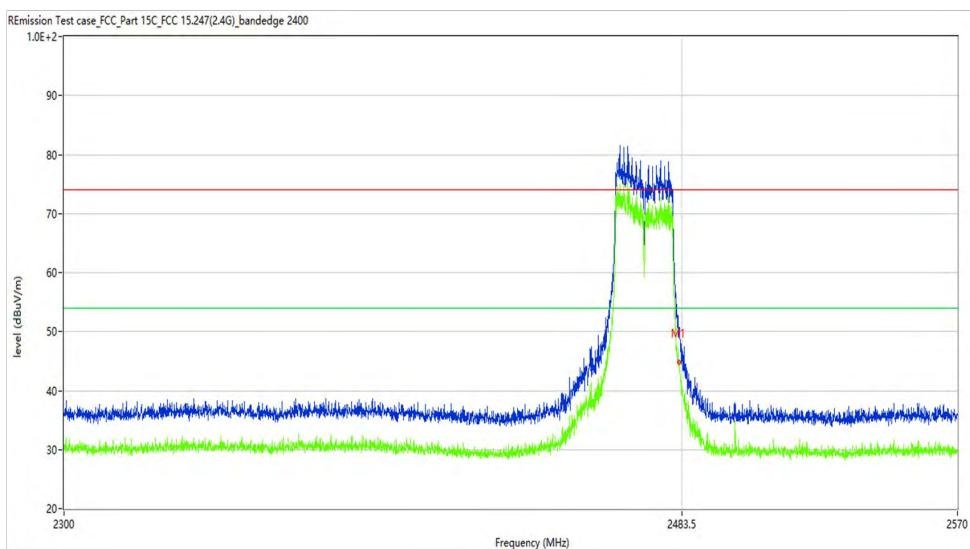

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	45.10	-3.87	74.0	-28.90	Peak	189.51	100	H	Pass
1**	2483.500	40.07	-3.87	54.0	-13.93	AV	189.51	100	H	Pass


WIFI2.4G-Bandedge -N-High 13 channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2020-01-21_16.18.20

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.1	Load:	full load
Hum.:	54	Remark:	DR-RSE01-E19110011-05#04

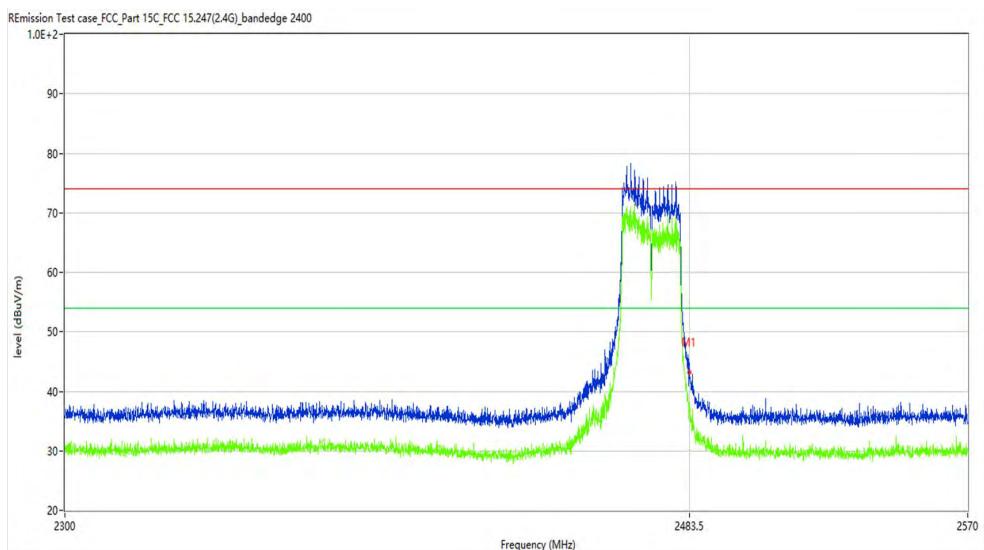

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	43.39	-3.87	74.0	-30.61	Peak	293.52	100	V	Pass
1**	2483.500	38.01	-3.87	54.0	-15.99	AV	293.52	100	V	Pass


WIFI2.4G-Bandedge -N40-Low channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2020-01-09_17.09.15

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

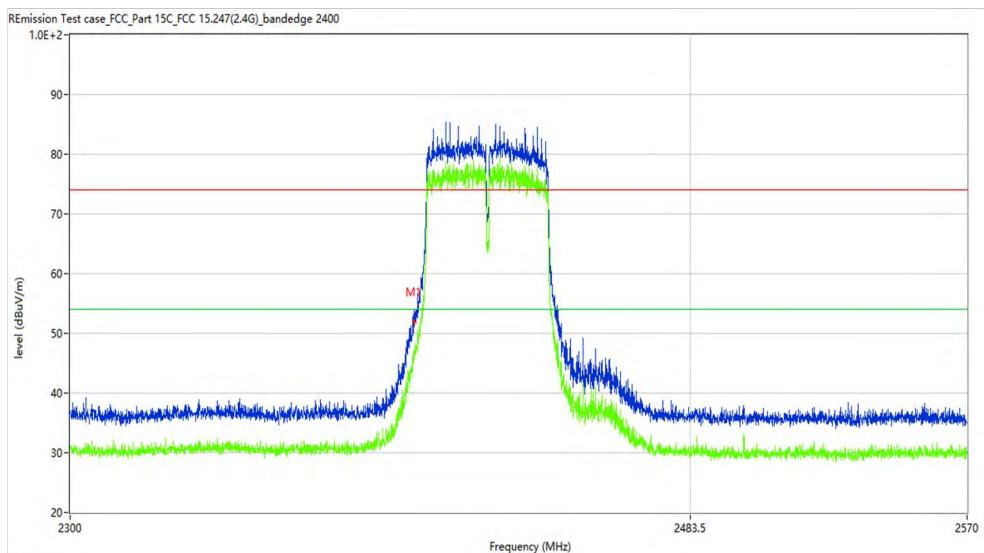

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2400.000	51.71	-4.18	74.0	-22.29	Peak	210.74	100	H	Pass
1**	2400.000	46.14	-4.18	54.0	-7.86	AV	210.74	100	H	Pass


WIFI2.4G-Bandedge -N40-Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2020-01-09_17.19.16

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

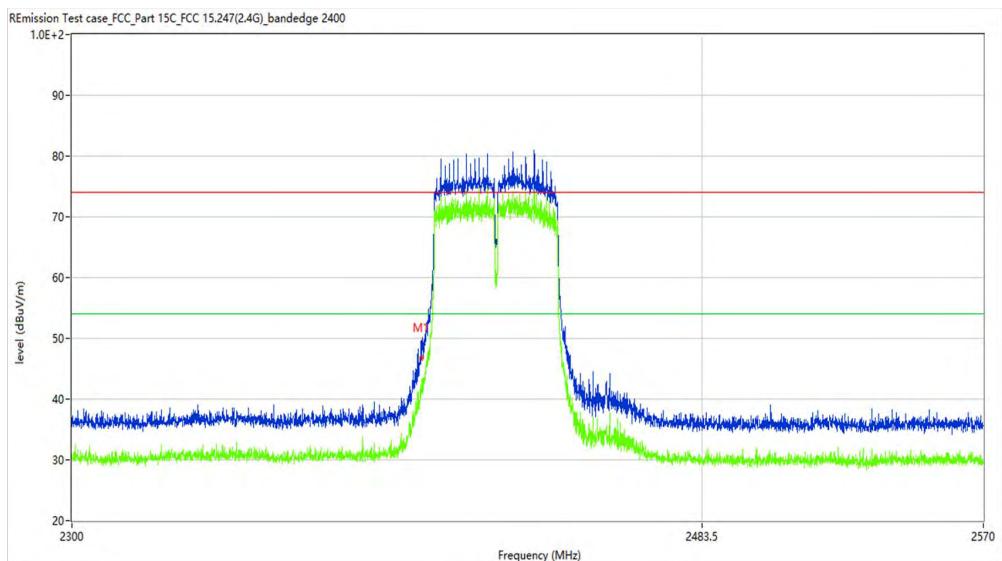

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2400.000	46.67	-4.18	74.0	-27.33	Peak	311.34	100	Vertical	Pass
1**	2400.000	41.42	-4.18	54.0	-12.58	AV	311.34	100	Vertical	Pass


WIFI2.4G-Bandedge -N40-High 9 channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2020-01-09_17.13.30

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

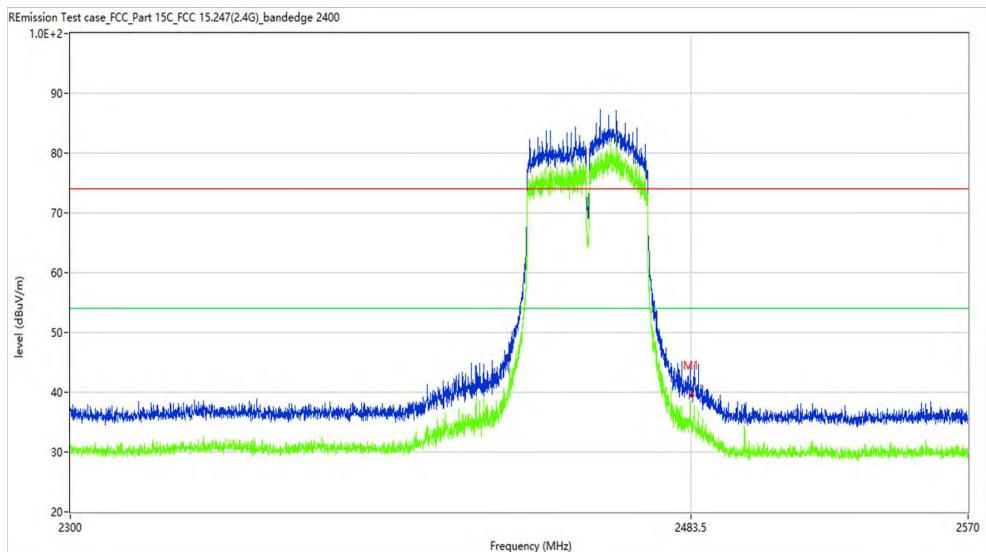

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	39.69	-3.87	74.0	-34.31	Peak	236.13	100	H	Pass
1**	2483.500	34.87	-3.87	54.0	-19.13	AV	236.13	100	H	Pass


WIFI2.4G-Bandedge –N40-High 9 channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2020-01-09_17.16.24

EUT Name:	N.A	Test Engineer:	LYT
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	20.9	Load:	Full load
Hum:	50	Remark:	DR-RSE01-E19110011-05#04

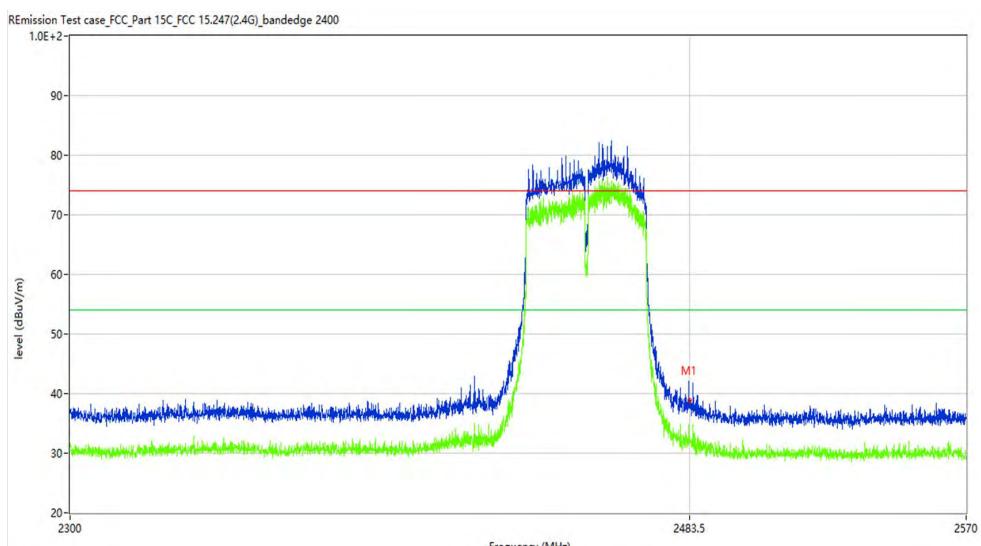

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	38.86	-3.87	74.0	-35.14	Peak	322.90	100	V	Pass
1**	2483.500	32.77	-3.87	54.0	-21.23	AV	322.90	100	V	Pass

WIFI2.4G-Bandedge -N40-High 11 channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2020-01-21_16.25.15

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19110011-05#04

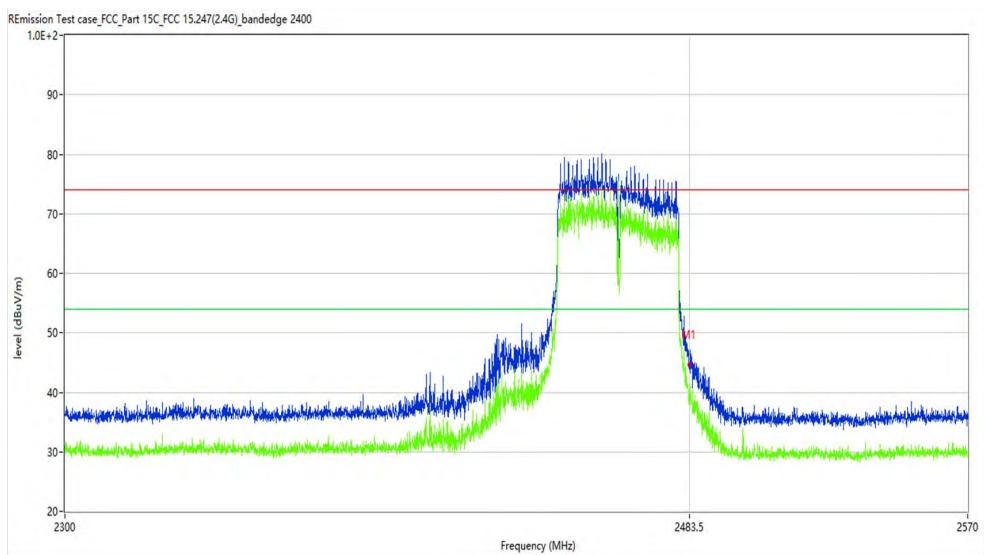

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	44.67	-3.87	74.0	-29.33	Peak	207.23	100	H	Pass
1**	2483.500	39.92	-3.87	54.0	-14.08	AV	207.23	100	H	Pass


WIFI2.4G-Bandedge -N40-High 11 channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2020-01-21_16.27.49

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	20.1	Load:	full load
Hum.:	54	Remark:	DR-RSE01-E19110011-05#04

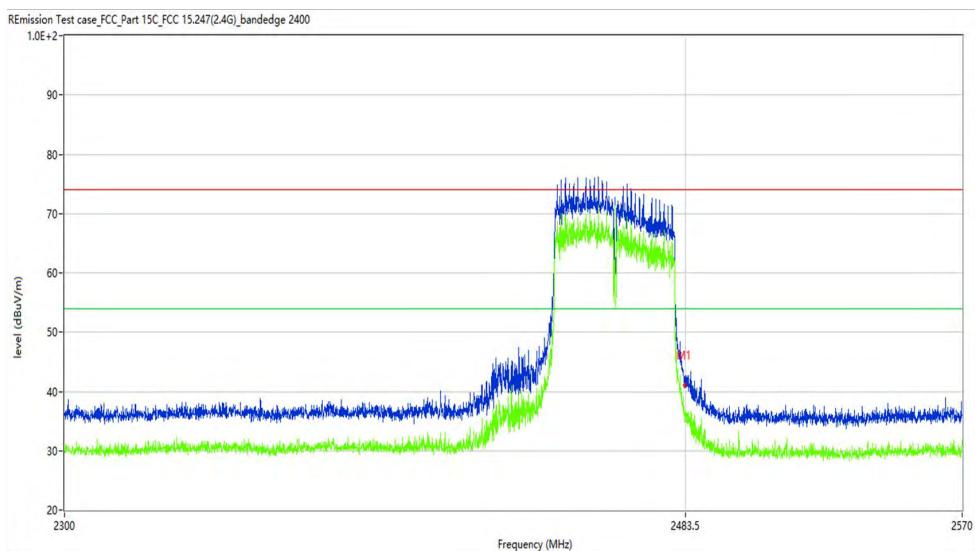

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	41.27	-3.87	74.0	-32.73	Peak	283.93	100	V	Pass
1**	2483.500	36.67	-3.87	54.0	-17.33	AV	283.93	100	V	Pass